

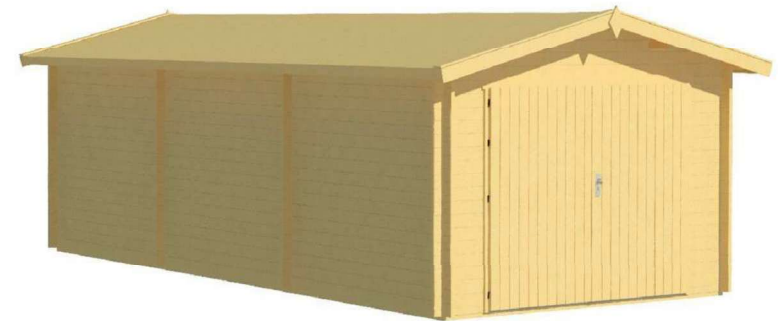
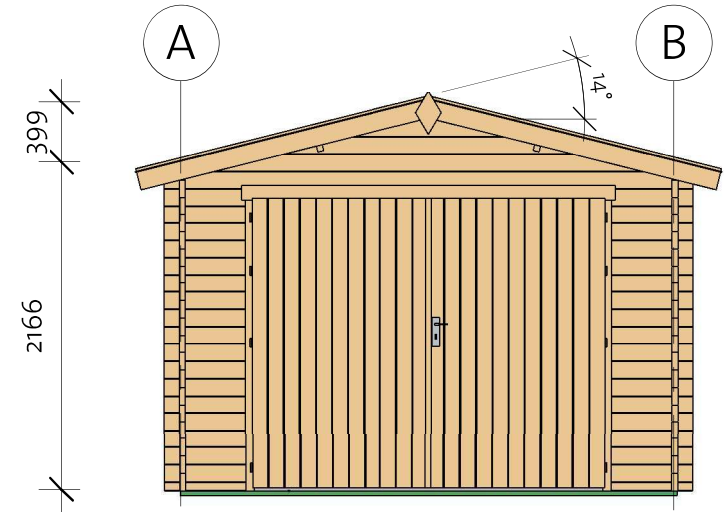



# Garage Miia 40 (330x680)

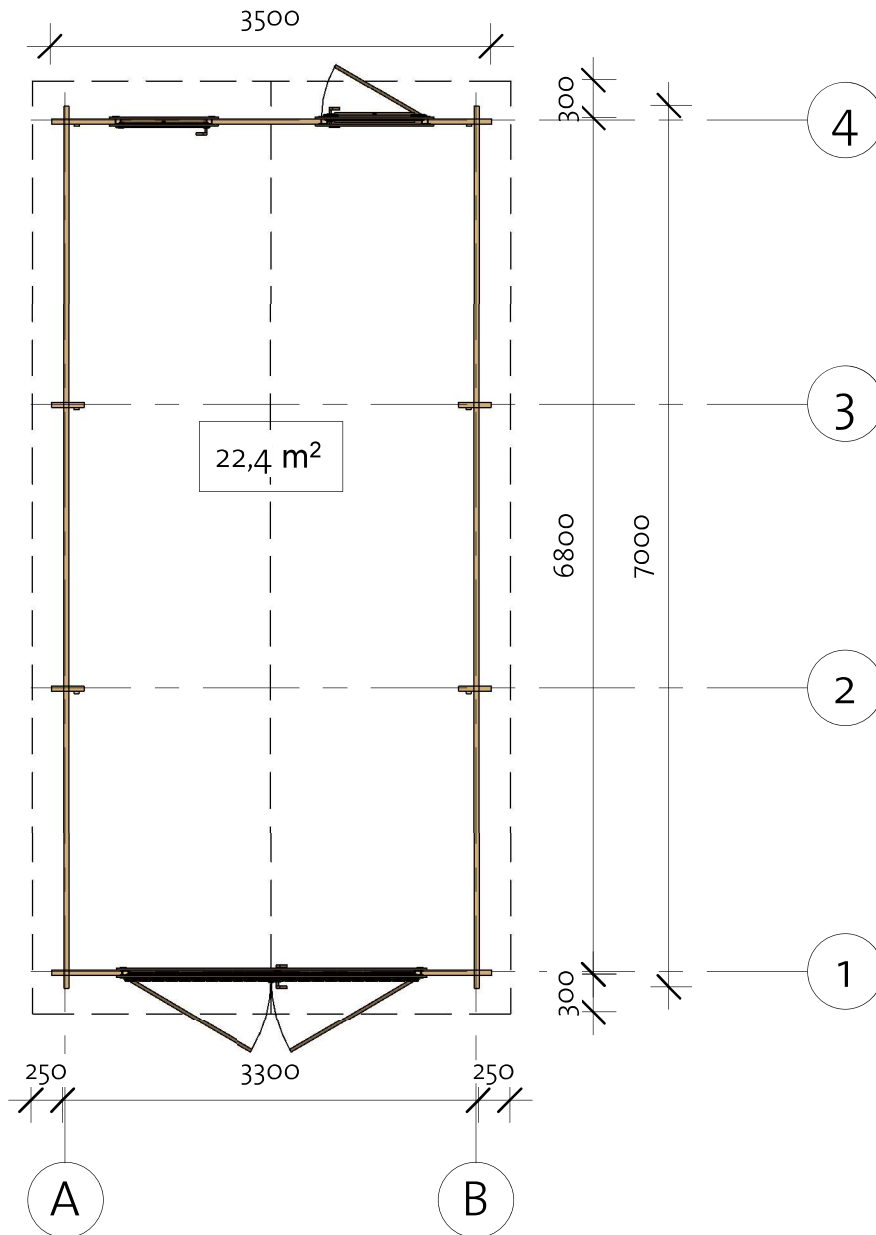

# Garage Miia 40 (330x680)



Foundation

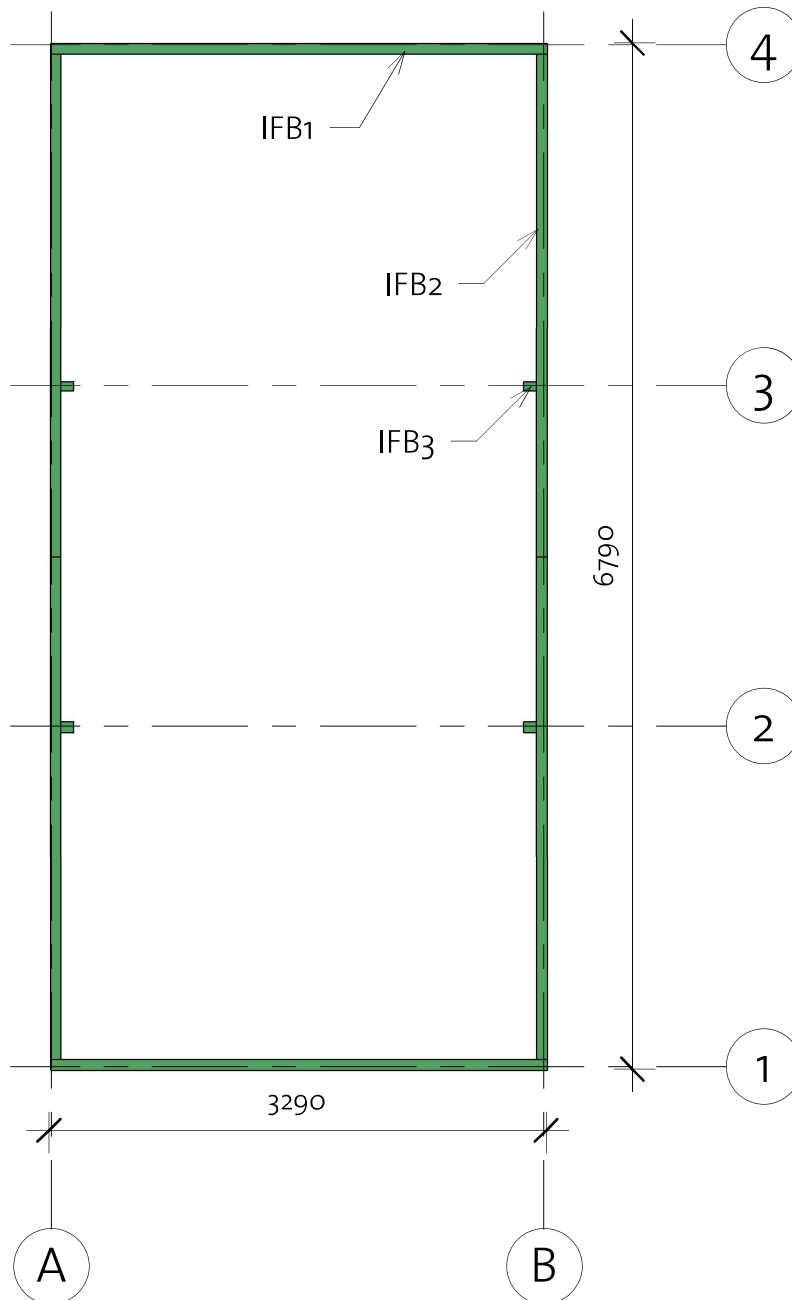

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3290
IFB2	IFB 70x40		4	3325
IFB3	IFB 70x40		4	85

# Garage Miia 40 (330x680)

Wall 1

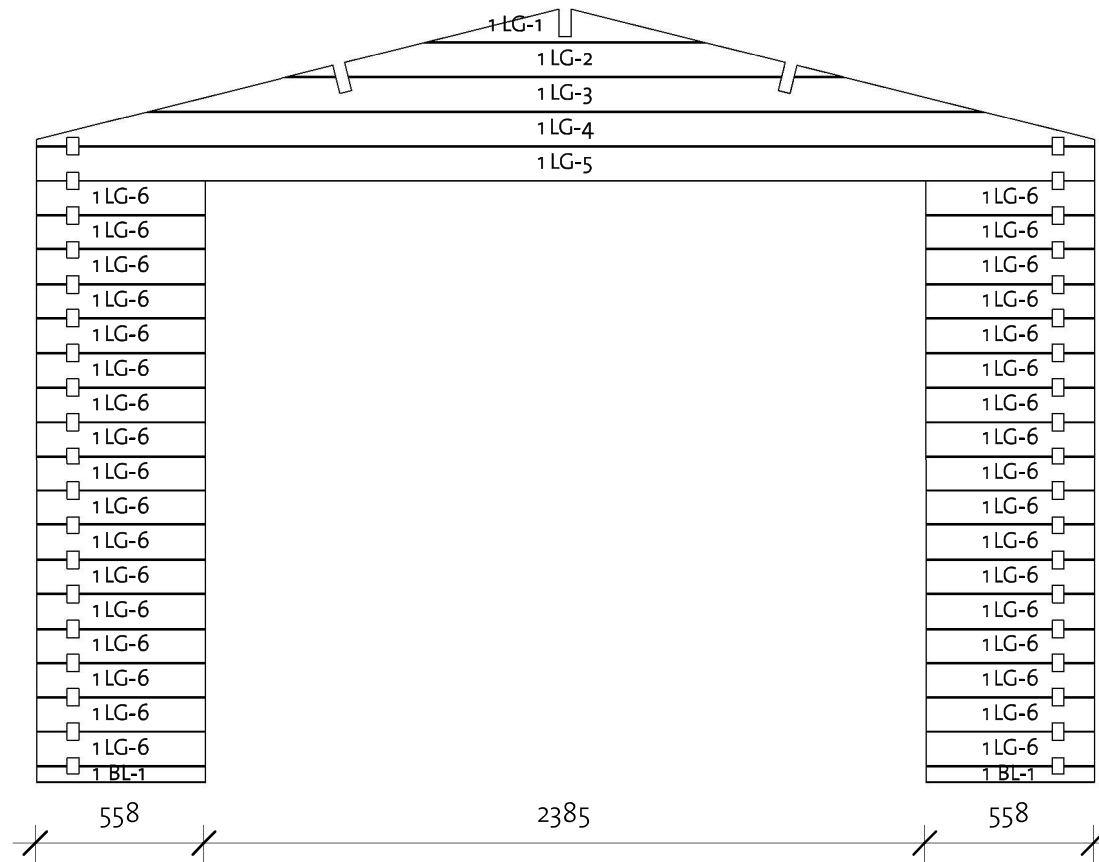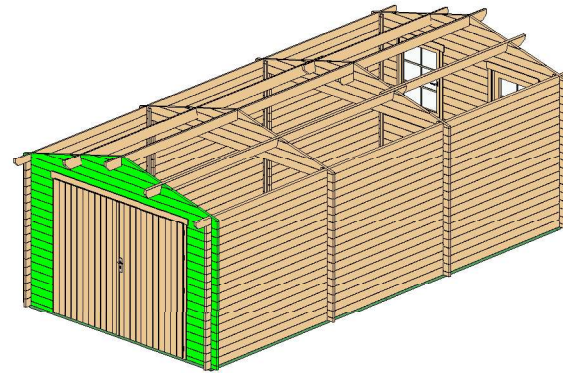

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	558
1LG-1 *	40x114	1	921
1LG-2 *	40x114	1	1841
1LG-3 *	40x114	1	2760
1LG-4 *	40x114	1	3500
1LG-5	40x114	1	3500
1LG-6	40x114	34	558



\* Gable - delivered premounted

Log Profile Wall 1	
Profile	Profile

40x57	
40x114	

# Garage Miia 40 (330x680)

Wall 2

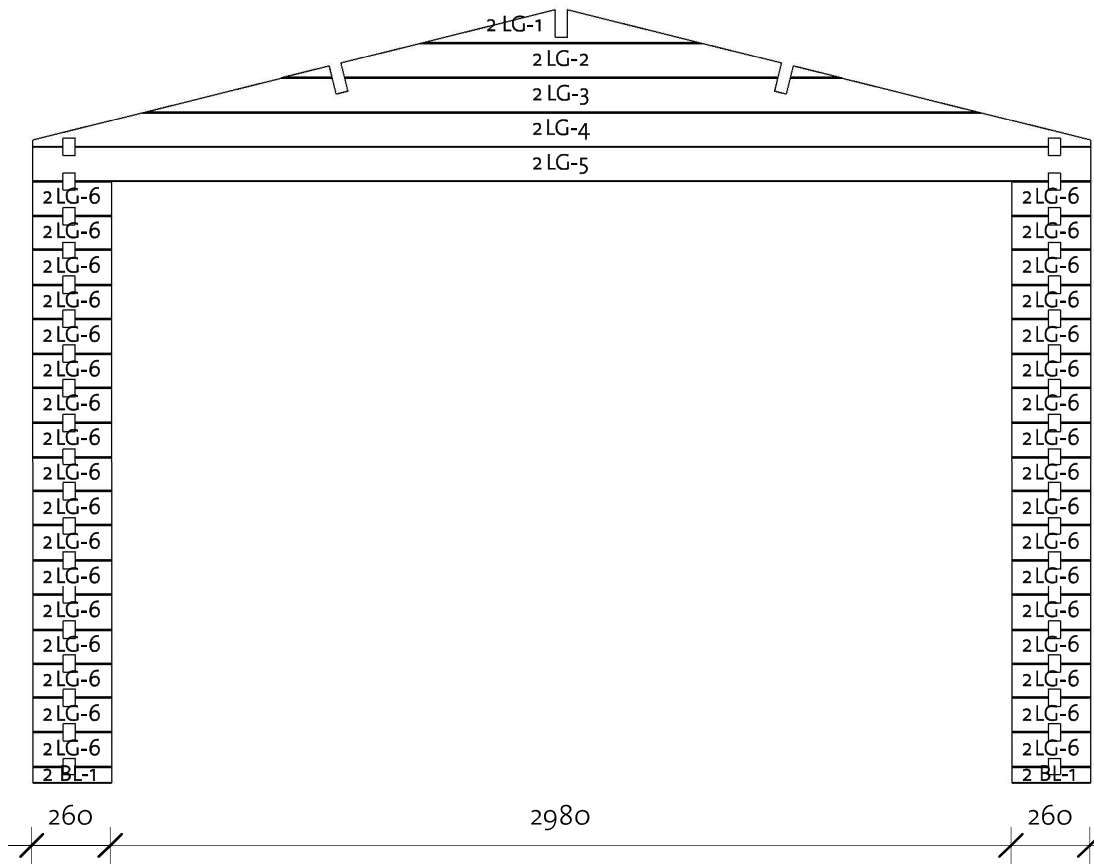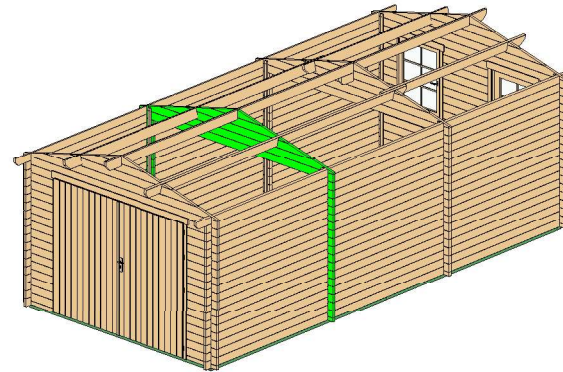



Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	2	260
2LG-1*	40X114	1	921
2LG-2*	40X114	1	1841
2LG-3*	40X114	1	2760
2LG-4*	40X114	1	3500
2LG-5	40X114	1	3500
2LG-6	40X114	34	260

\* Gable - delivered premounted



Log Profile Wall 2	
Profile	Profile

40X57	
40X114	

92105143\_210525

# Garage Miia 40 (330x680)

Wall 3

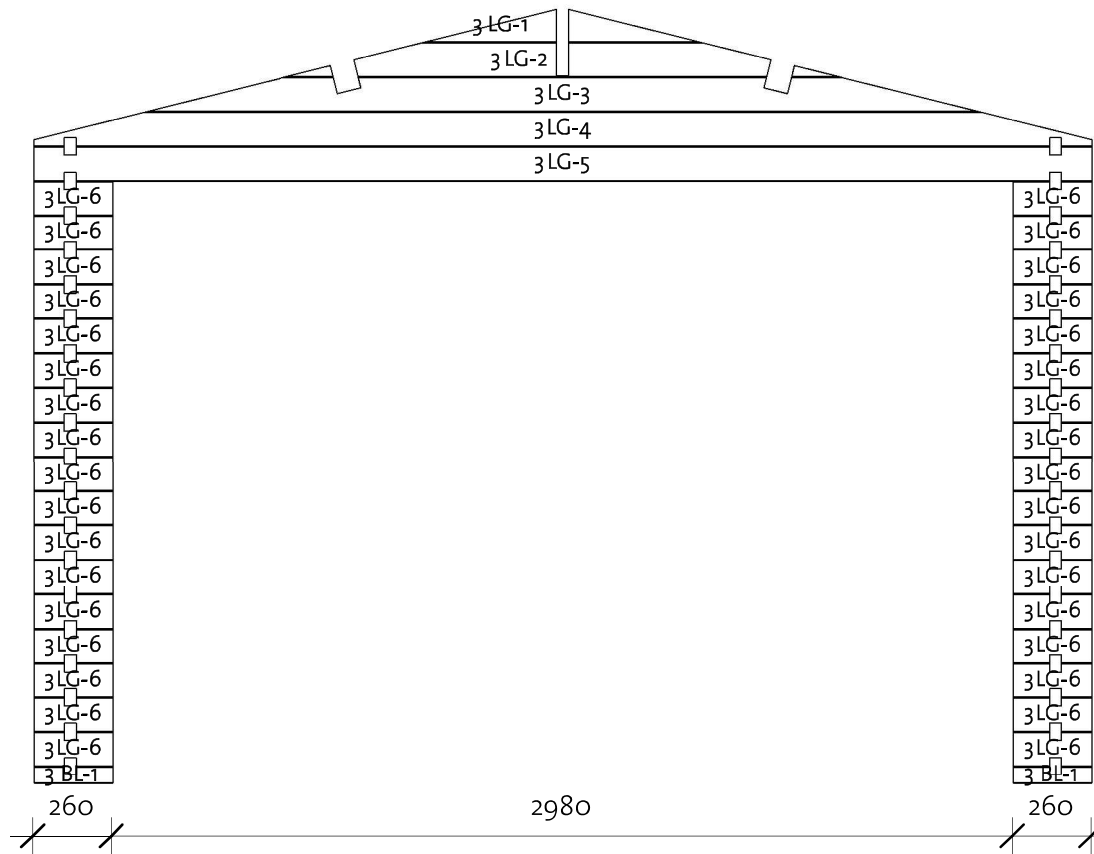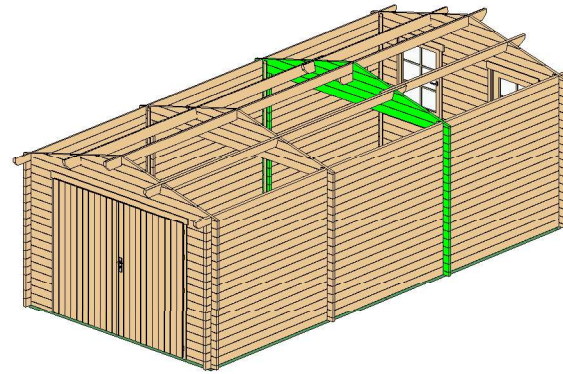

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	2	260
3LG-1*	40x114	1	921
3LG-2*	40x114	1	1841
3LG-3*	40x114	1	2760
3LG-4*	40x114	1	3500
3LG-5	40x114	1	3500
3LG-6	40x114	34	260



\* Gable - delivered premounted

Log Profile Wall 3	
Profile	Profile

40x57	
40x114	

# Garage Miia 40 (330x680)

Wall 4

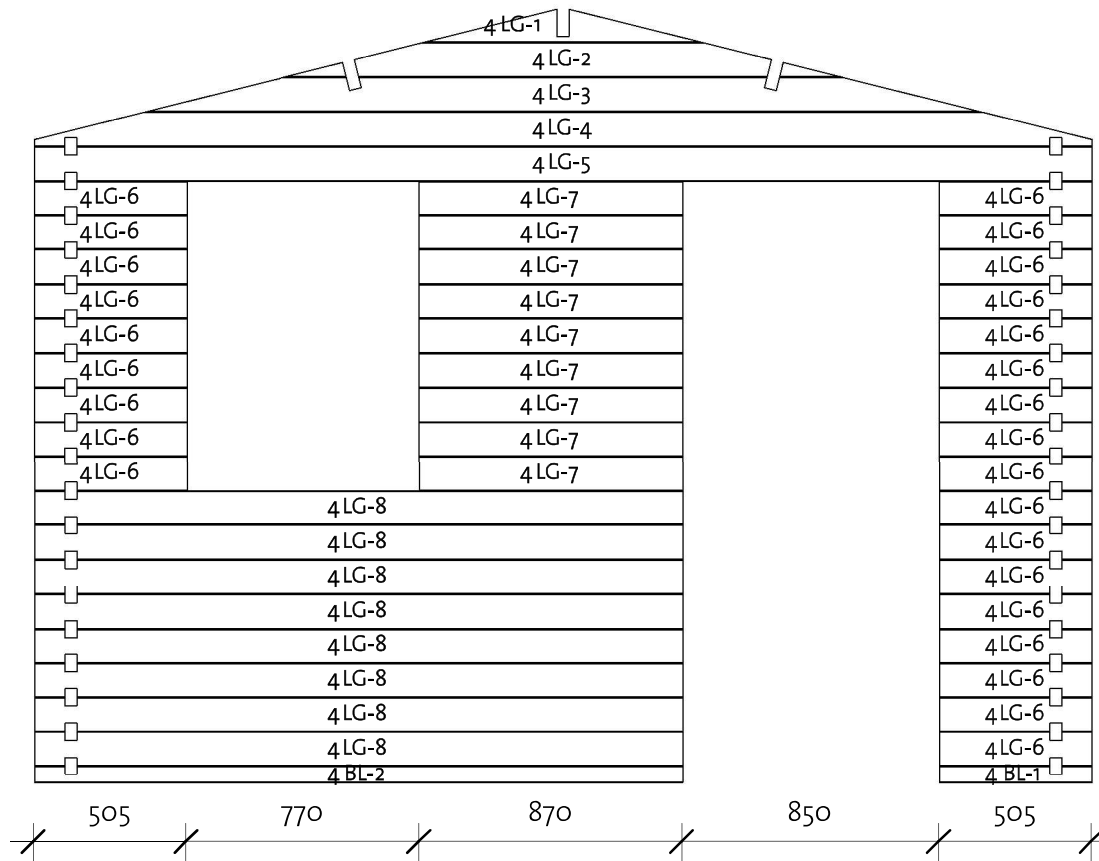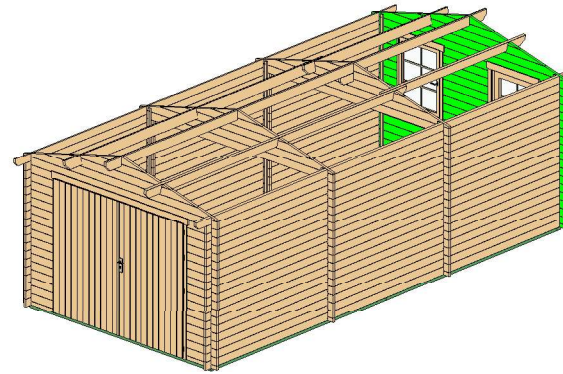



Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	505
4BL-2	40X57	1	2145
4LG-1*	40X114	1	921
4LG-2*	40X114	1	1841
4LG-3*	40X114	1	2760
4LG-4*	40X114	1	3500
4LG-5	40X114	1	3500
4LG-6	40X114	26	505
4LG-7	40X114	9	870
4LG-8	40X114	8	2145



\* Gable - delivered premounted


Log Profile Wall 4	
Profile	Profile

40X57	
40X114	

# Garage Miia 40 (330x680)


Wall A

Log Profile Wall A	
Profile	Profile
40X114	
40X114	

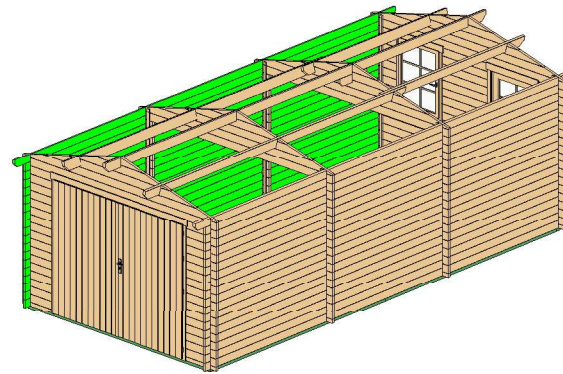

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	18	2373
ALG-2	40X114	18	4627
ATL-1	40X114	1	2573
ATL-2	40X114	1	4827

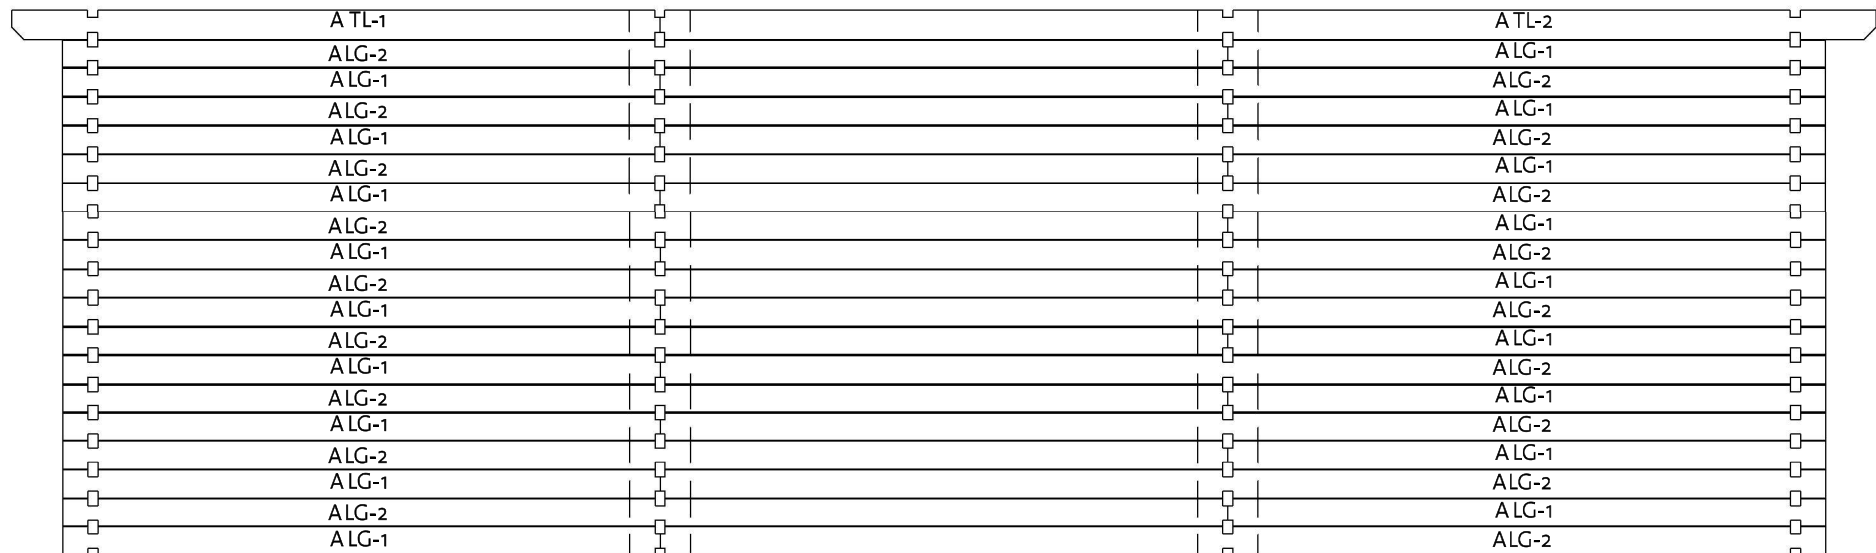



200  
92105143\_210525


7000

200

# Garage Miia 40 (330x680)


Wall B

Log Profile Wall B	
Profile	Profile
40X114	
40X114	

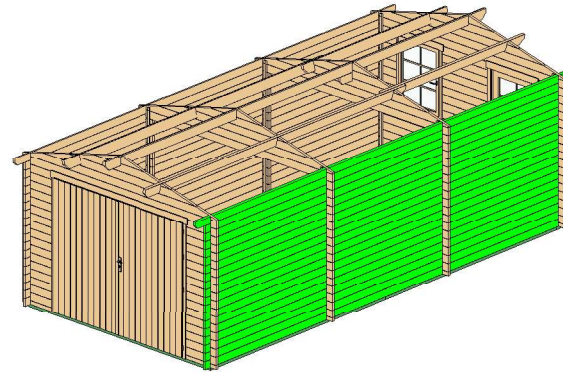

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	40X114	18	2373
BLG-2	40X114	18	4627
BTL-1	40X114	1	2573
BTL-2	40X114	1	4827

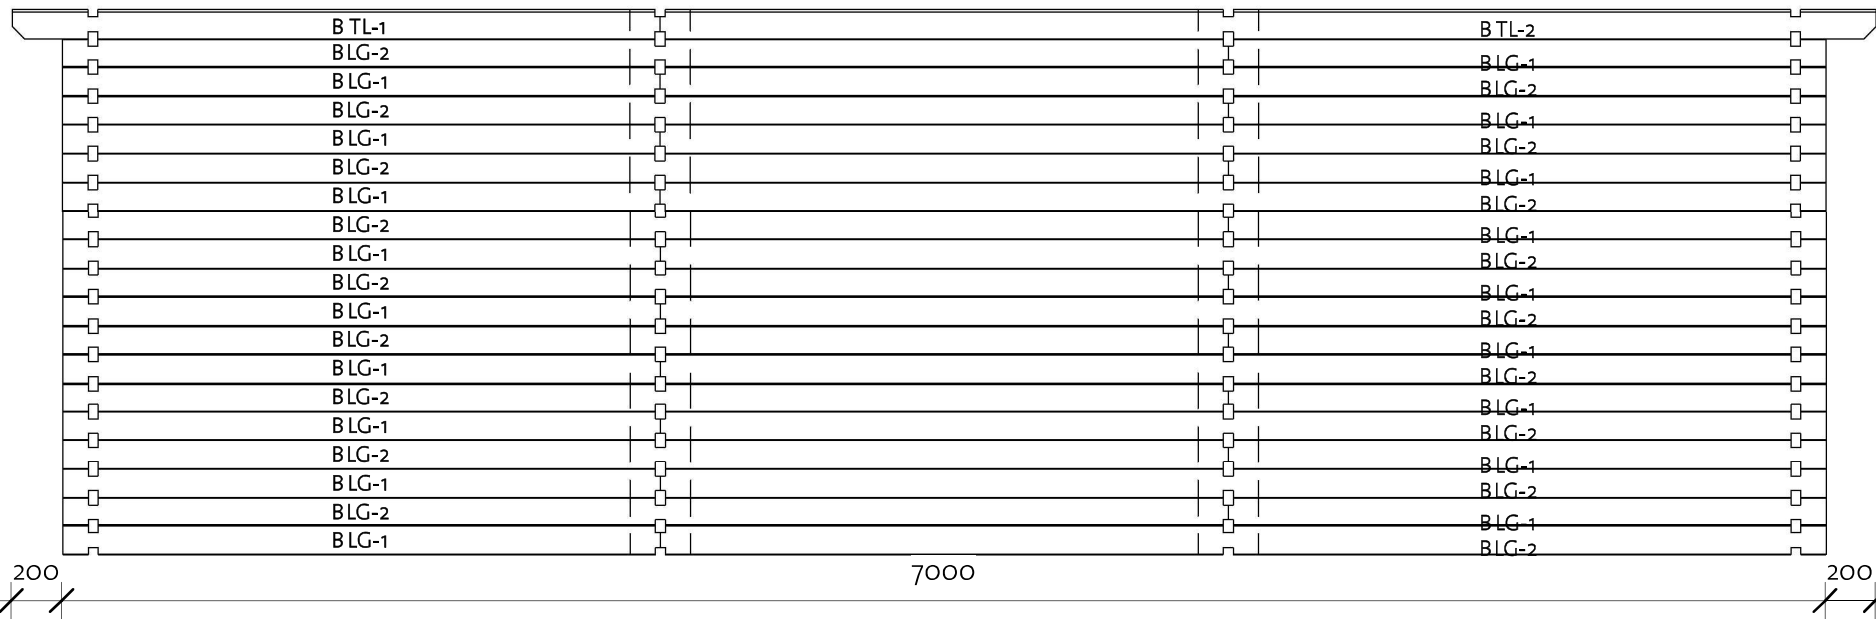






# Garage Miia 40 (330x680)

Roof 1


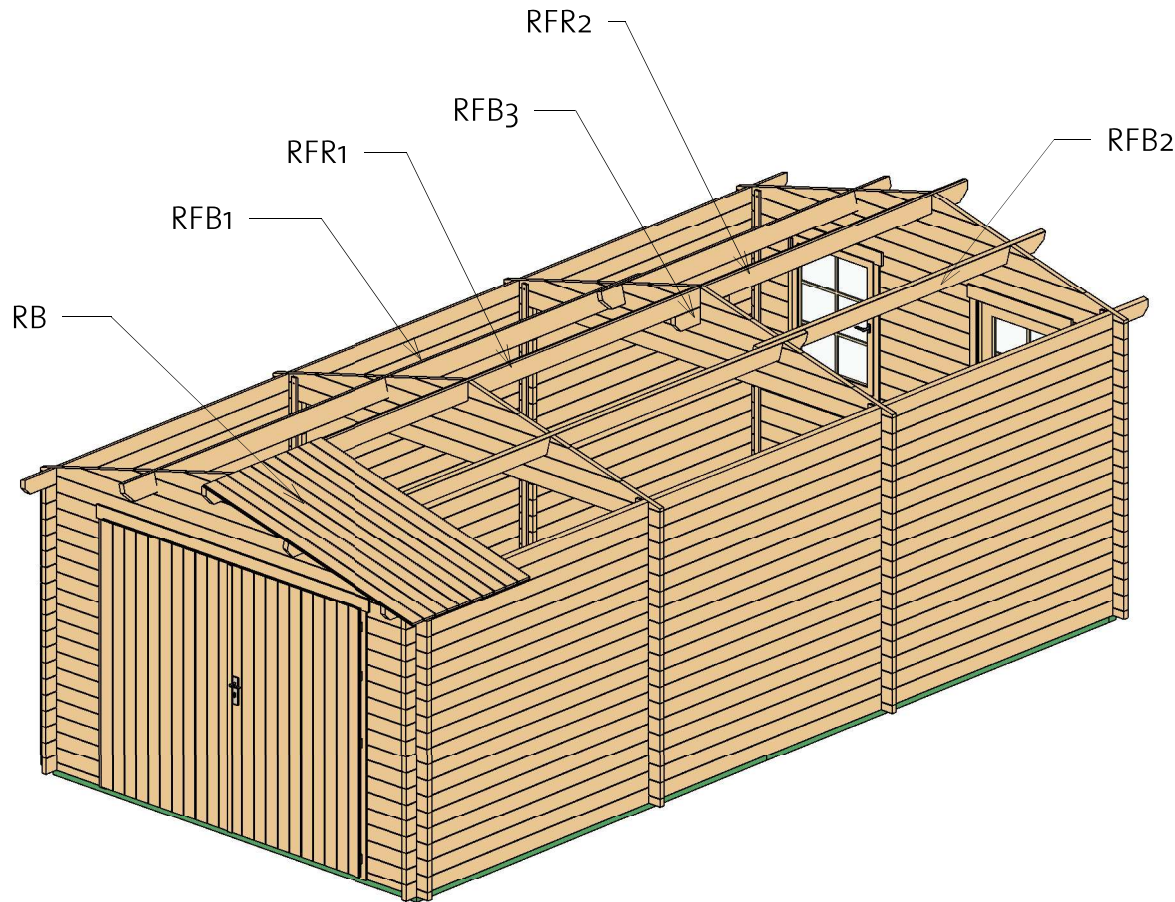


Roof				
Mark	Type	Profile	Count	Length
RB	17x114		132	1953
RFB1	Beam 40x143		2	5047
RFB2	Beam 40x143		2	2793
RFB3	Beam 40x120		1	520
RFR1	Ridge 40x143		1	4827
RFR2	Ridge 40x143		1	2573



# Garage Miia 40 (330x680)

2) Facia

Roof 2

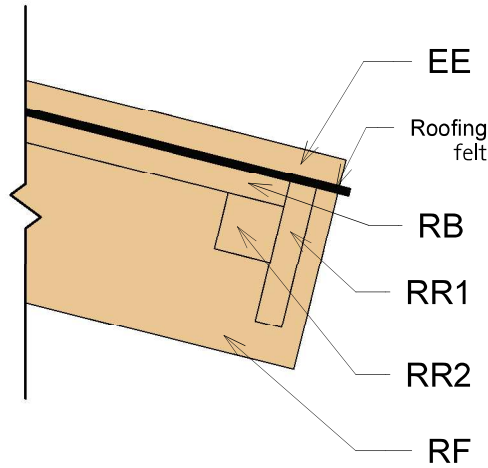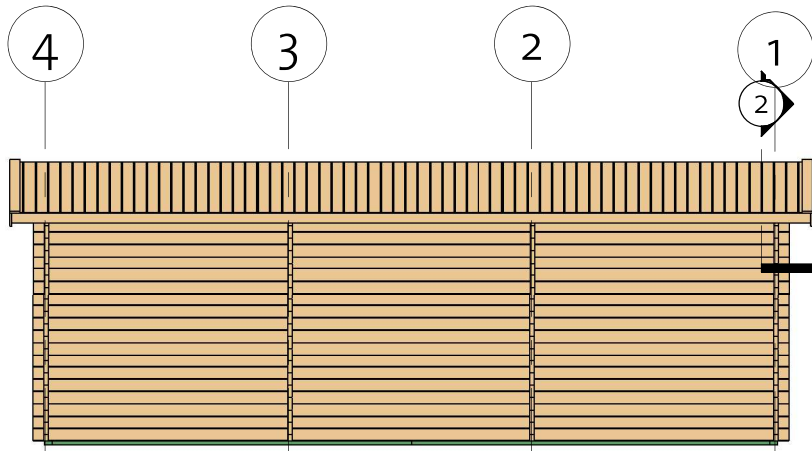

3) Roof Reinforcement

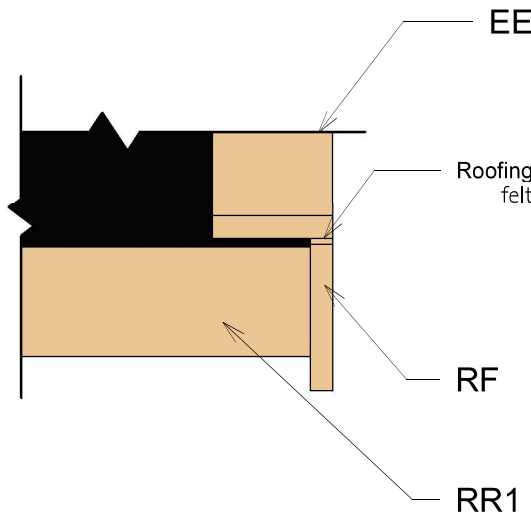
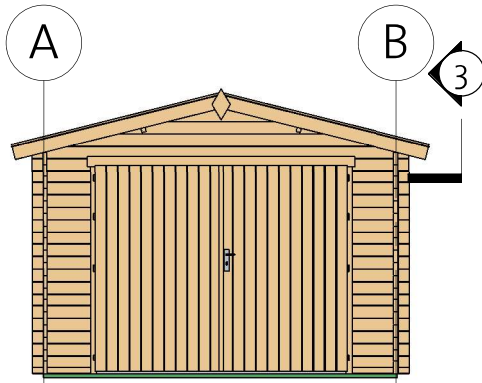


Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	1990
RF	Roof Fascia 18x120		4	1990
RR1	Roof reinforcement 18x95		4	3700
RR2	Roof reinforcement 38x38		4	3700

# Garage Miia 40 (330x680)

Extras

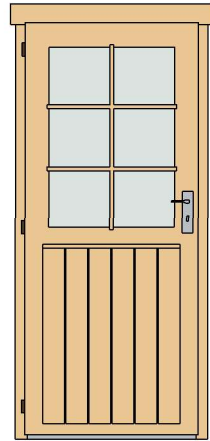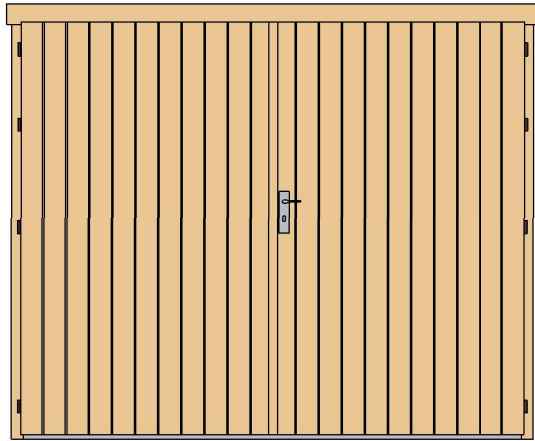

Door Schedule				
Model	Type	Width	Height	Count
CDD10R	Classic double door 10, wood right	2370	1955	1
CD4L	Classic door 4 left	840	1955	1
DCB6	Door Crossbar 6	--	--	1


Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Door bolt	315 x 65	2
Screws	5,0 x 70	15
Screws	5,0 x 40	16
Bolts	M8 x 70	24
Screws	6,0 x 140	60
Screws	4,0 x 40	105
Dowels	16,0 x 150	120
Screws	4,0 x 50	430

Window Schedule				
Mark	Type	Width	Height	Count

CW1L	Classic window 1 left	765	990	1
------	-----------------------	-----	-----	---

WCB6	Windows Crossbar 6	--	--	1
------	--------------------	----	----	---




Type	Count	Length
Windboard 18x40	8	2200





Type	Count
Romb	2






# Garage Miia 40 (330x680)

## List of all items 1

Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		2	3290
IFB2	IFB 70x40		4	3325
IFB3	IFB 70x40		4	85

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	1990
RF	Roof Fascia 18x120		4	1990
RR1	Roof reinforce ment 18x95		4	3700
RR2	Roof reinforce ment 38x38		4	3700

Roof				
Mark	Type	Profile	Count	Length
RB	17x114		132	1953
RFB1	Beam 40x143		2	5047
RFB2	Beam 40x143		2	2793
RFB3	Beam 40x120		1	520
RFR1	Ridge 40x143		1	4827
RFR2	Ridge 40x143		1	2573

# Garage Miia 40 (330x680)

## List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	558
1LG-1*	40X114	1	921
1LG-2*	40X114	1	1841
1LG-3*	40X114	1	2760
1LG-4*	40X114	1	3500
1LG-5	40X114	1	3500
1LG-6	40X114	34	558

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	2	260
2LG-1*	40X114	1	921
2LG-2*	40X114	1	1841
2LG-3*	40X114	1	2760
2LG-4*	40X114	1	3500
2LG-5	40X114	1	3500
2LG-6	40X114	34	260

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	2	260
3LG-1*	40X114	1	921
3LG-2*	40X114	1	1841
3LG-3*	40X114	1	2760
3LG-4*	40X114	1	3500
3LG-5	40X114	1	3500
3LG-6	40X114	34	260

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	505
4BL-2	40X57	1	2145
4LG-1*	40X114	1	921
4LG-2*	40X114	1	1841
4LG-3*	40X114	1	2760
4LG-4*	40X114	1	3500
4LG-5	40X114	1	3500
4LG-6	40X114	26	505
4LG-7	40X114	9	870
4LG-8	40X114	8	2145

\* Gable - delivered premounted

# Garage Miia 40 (330x680)

## List of all items 3



Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40x114	18	2373
ALG-2	40x114	18	4627
ATL-1	40x114	1	2573
ATL-2	40x114	1	4827


Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40x114	18	2373
BLG-2	40x114	18	4627
BTL-1	40x114	1	2573
BTL-2	40x114	1	4827

Log profiles	
Profile	Profile

40x57	
40x114	

Log profiles	
Profile	Profile

40x114	
--------	---