
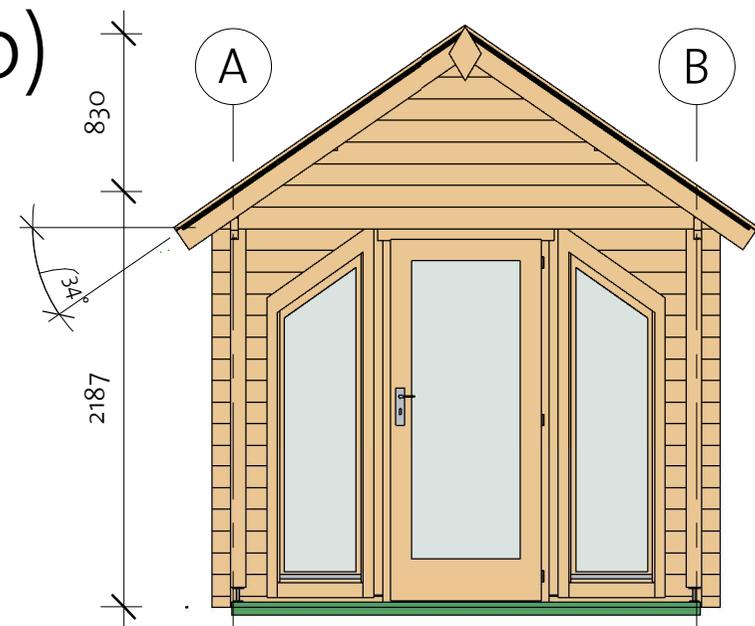



Dockside Sauna 2 40 (250x500)

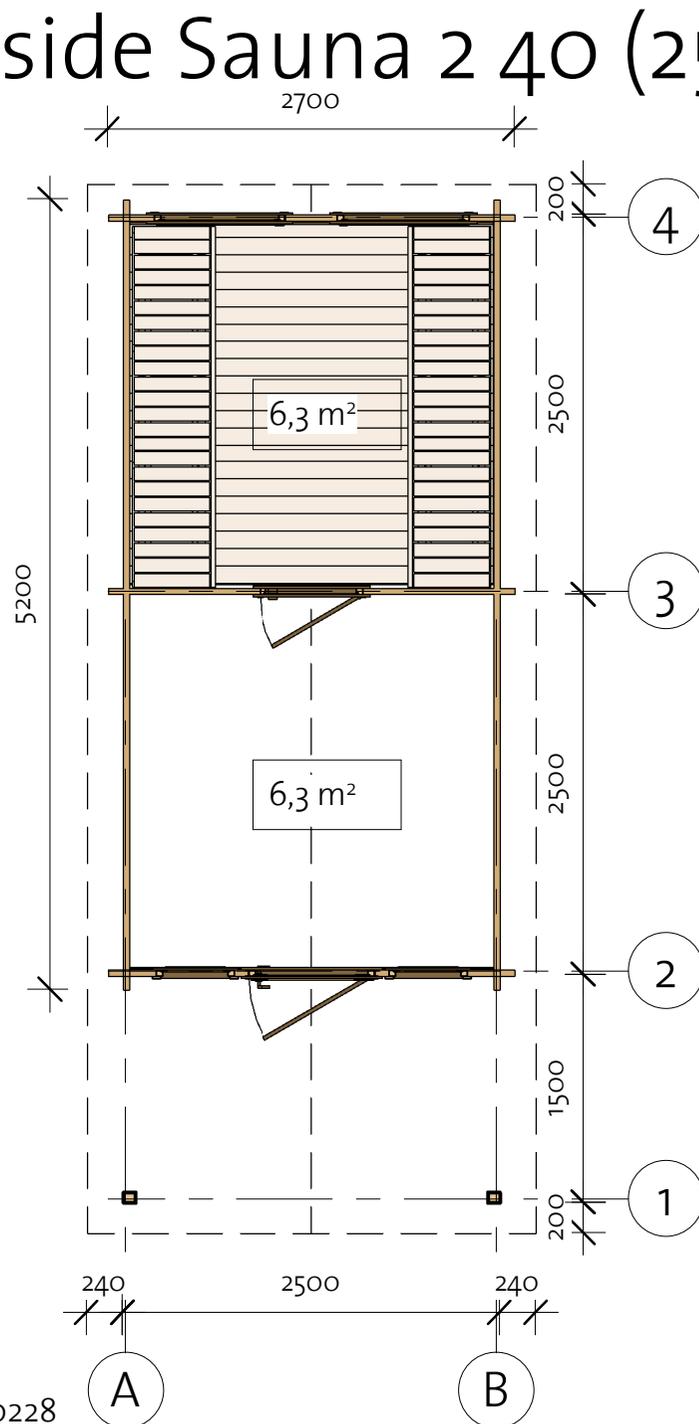

92503052_260228

Dockside Sauna 2 40 (250x500)

Foundation

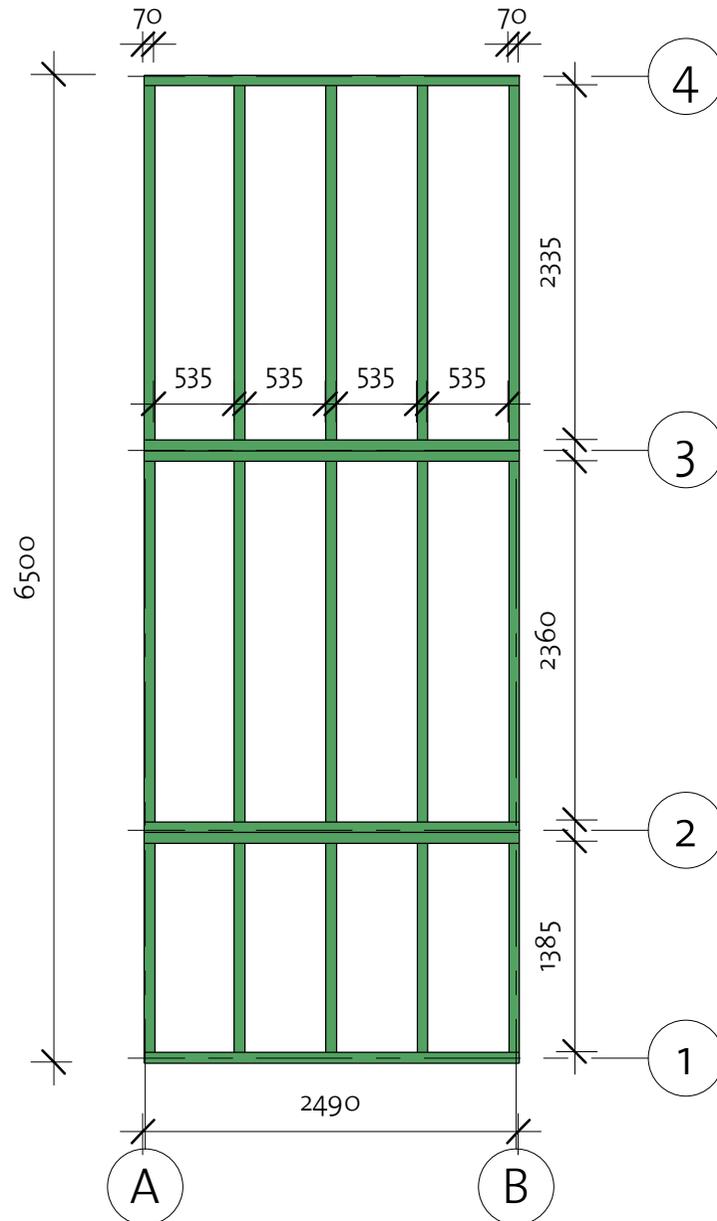


Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		5	2360
IFB2	IFB 70x40		6	2490
IFB3	IFB 70x40		5	1385
IFB4	IFB 70x40		5	2335

Dockside Sauna 2 40 (250x500)

Floor Plan

① Baseboard

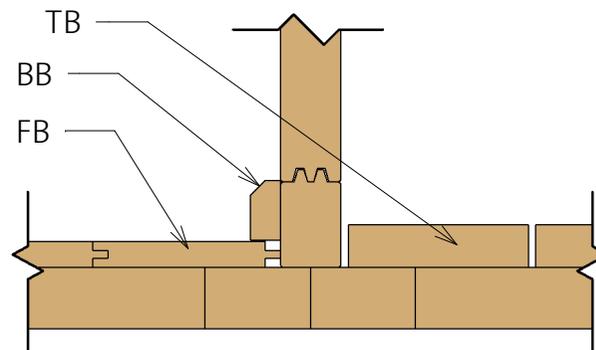

Floor Schedule


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

FB	FB 17x114		45	2414
----	-----------	---	----	------

Terrace Schedule

TB	TB 28x120		12	2490
----	-----------	---	----	------



BB	BB 18x40		8	2500
----	----------	---	---	------

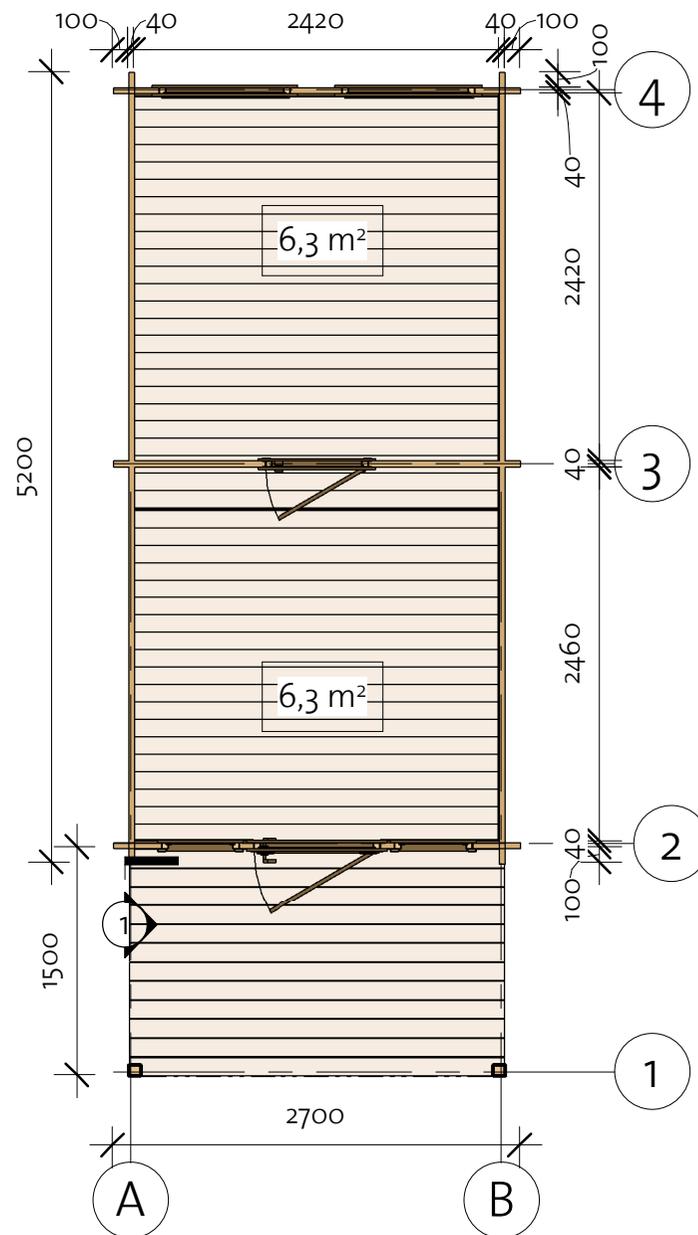

92503052_260228

Dockside Sauna 2 40 (250x500)

Wall 1

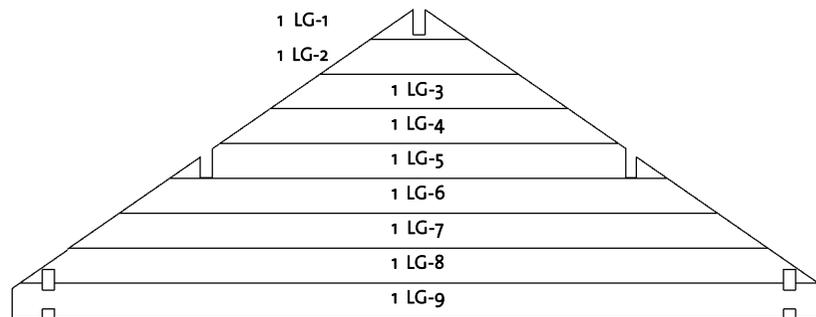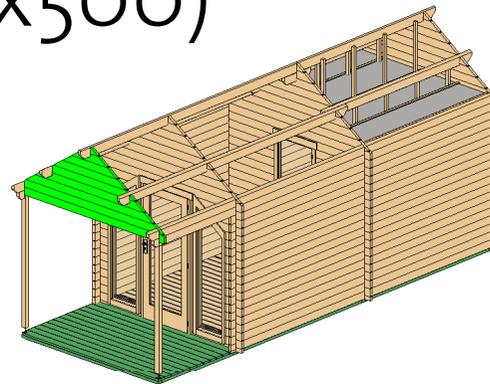

Wall 1			
Mark	Profile	Count	Cut Length


1LG-1 *	40X114	1	321
1LG-2 *	40X114	1	654
1LG-3 *	40X114	1	986
1LG-4 *	40X114	1	1318
1LG-5 *	40X114	1	1650
1LG-6 *	40X114	1	1983
1LG-7 *	40X114	1	2315
1LG-8 *	40X114	1	2647
1LG-9 *	40X114	1	2700

* Gable - delivered premounted

Log Profile Wall 1

Profile	Profile
---------	---------

40X114





Dockside Sauna 2 40 (250x500)

Wall 2

Log Profile Wall 2	
Profile	Profile

40x57	
40x114	

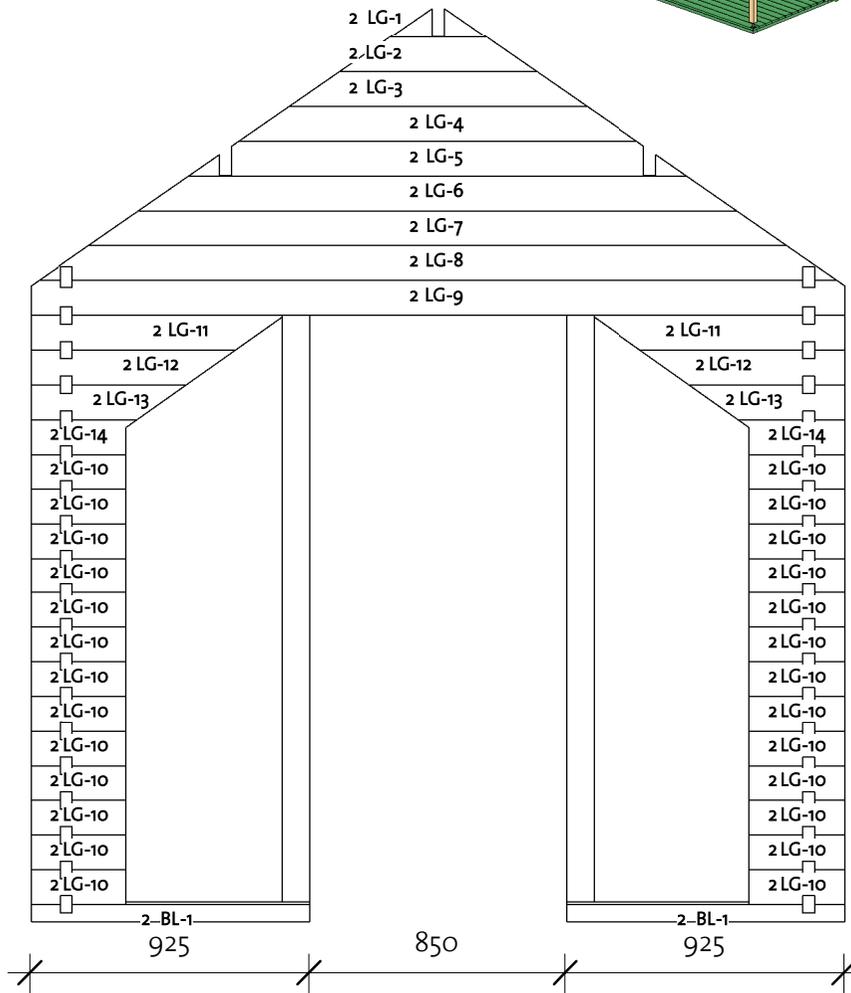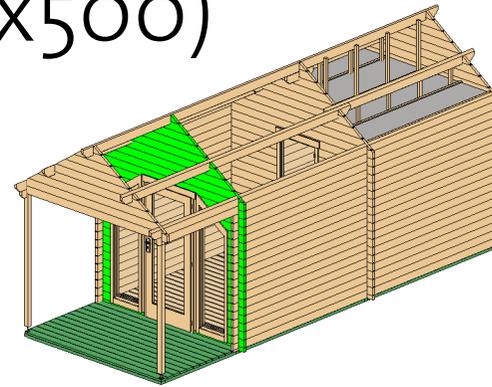

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40x57	2	925
2LG-1 *	40x114	1	321
2LG-2 *	40x114	1	654
2LG-3 *	40x114	1	986
2LG-4 *	40x114	1	1318
2LG-5 *	40x114	1	1650
2LG-6 *	40x114	1	1983
2LG-7 *	40x114	1	2315
2LG-8 *	40x114	1	2647
2LG-9 *	40x114	1	2700
2LG-10	40x114	26	318
2LG-11	40x114	2	835
2LG-12	40x114	2	691
2LG-13	40x114	2	528
2LG-14	40x114	2	365



* Gable - delivered premounted

Column schedule		
Type	Length	Count

Post 40x90	1930	2
------------	------	---

Dockside Sauna 2 40 (250x500)

Wall 3

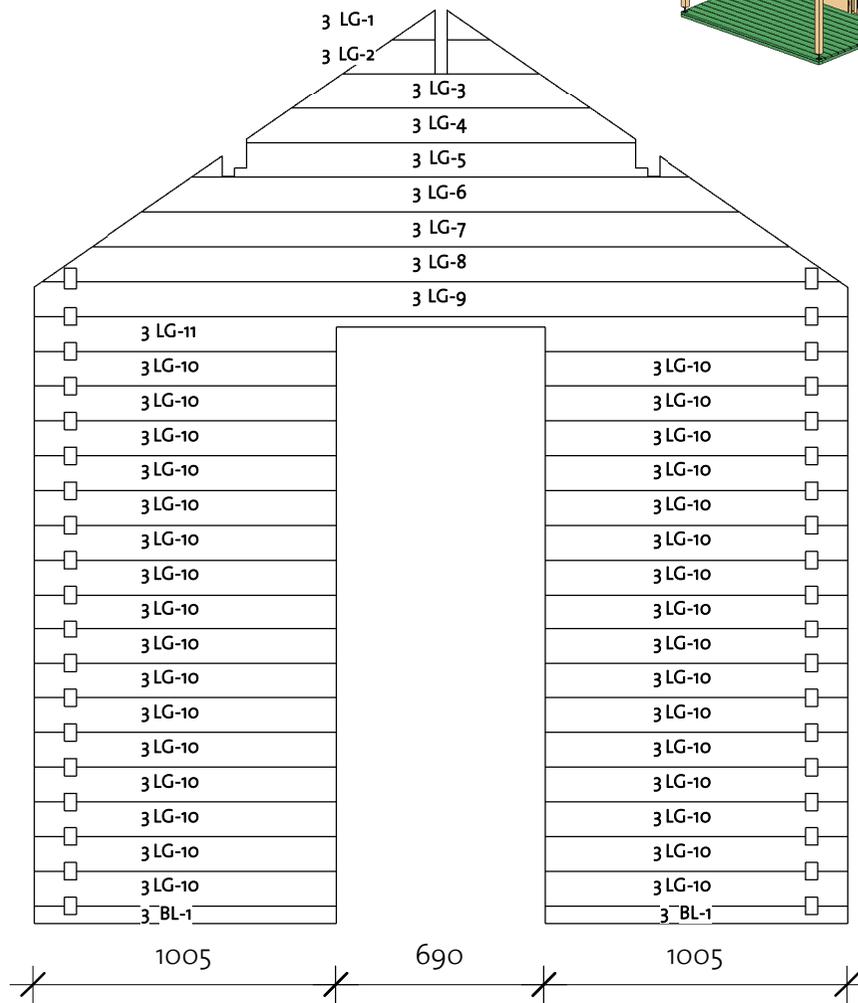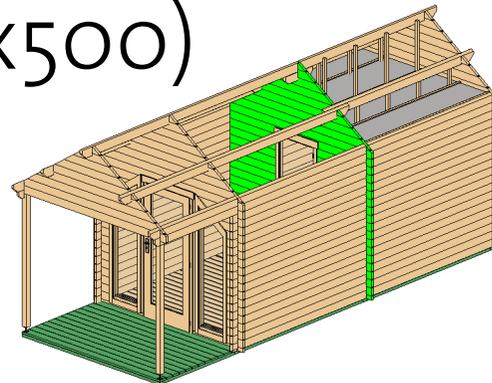

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40x57	2	1005
3LG-1 *	40x114	1	321
3LG-2 *	40x114	1	654
3LG-3 *	40x114	1	986
3LG-4 *	40x114	1	1287
3LG-5 *	40x114	1	1650
3LG-6 *	40x114	1	1983
3LG-7 *	40x114	1	2315
3LG-8 *	40x114	1	2647
3LG-9 *	40x114	1	2700
3LG-10	40x114	32	1005
3LG-11	40x114	1	2700



* Gable - delivered premounted

Log Profile Wall 3	
Profile	Profile

40x57	
40x114	

Dockside Sauna 2 40 (250x500)

Wall 4

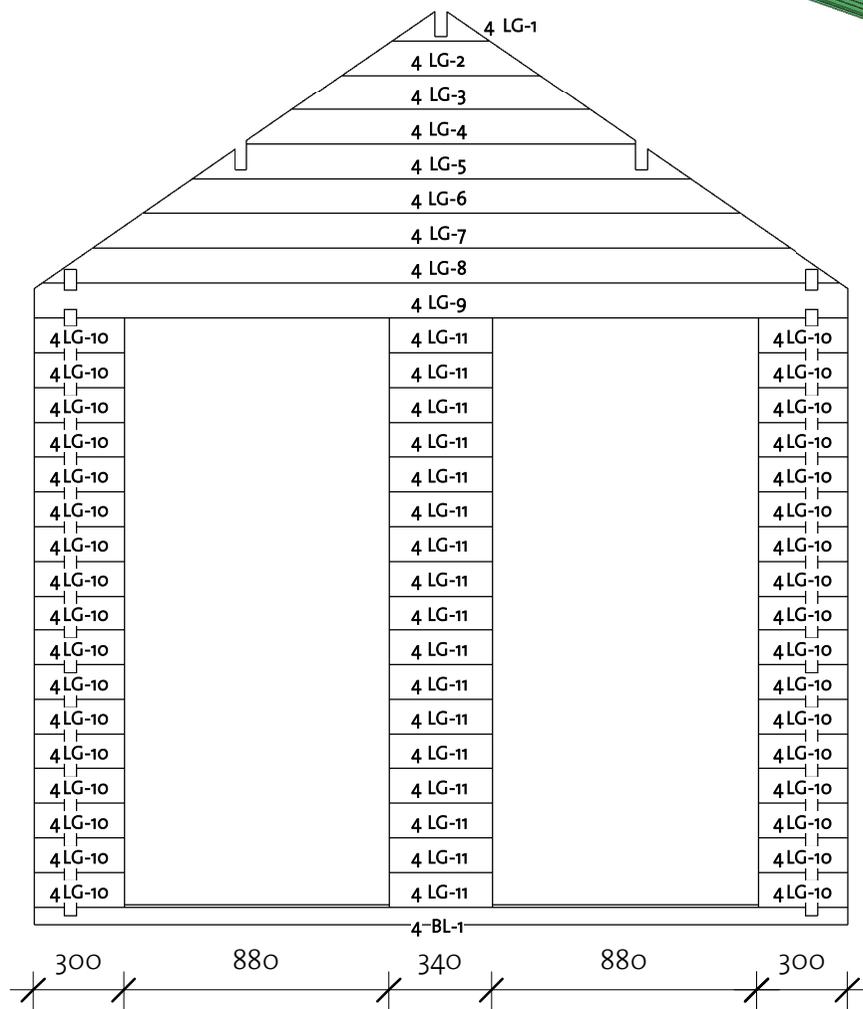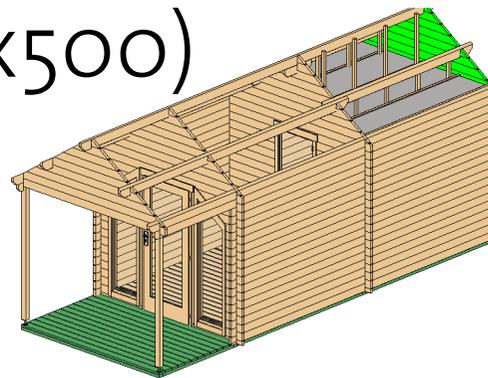

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	2700
4LG-1 *	40X114	1	321
4LG-2*	40X114	1	654
4LG-3*	40X114	1	986
4LG-4*	40X114	1	1287
4LG-5*	40X114	1	1650
4LG-6*	40X114	1	1983
4LG-7*	40X114	1	2315
4LG-8*	40X114	1	2647
4LG-9*	40X114	1	2700
4LG-10	40X114	34	300
4LG-11	40X114	17	340

* Gable - delivered premounted

Log Profile Wall 4	
Profile	Profile


40X57	
40X114	

Dockside Sauna 2 40 (250x500)

Wall A


Log Profile Wall A	
Profile	Profile

40X114	
40X135	

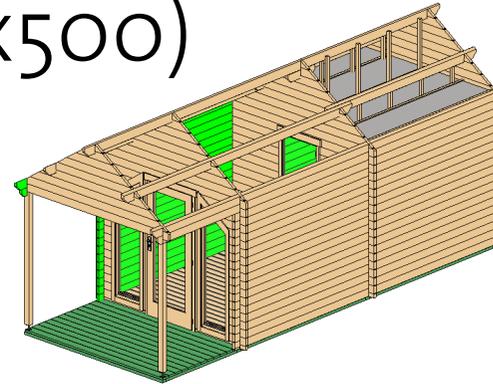

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	1	4120
ALG-2	40X114	16	5200
ALG-3	40X114	1	2580
ALG-4	40X114	1	5200
ATL-1	40X135	1	4220
ATL-2	40X135	1	2680

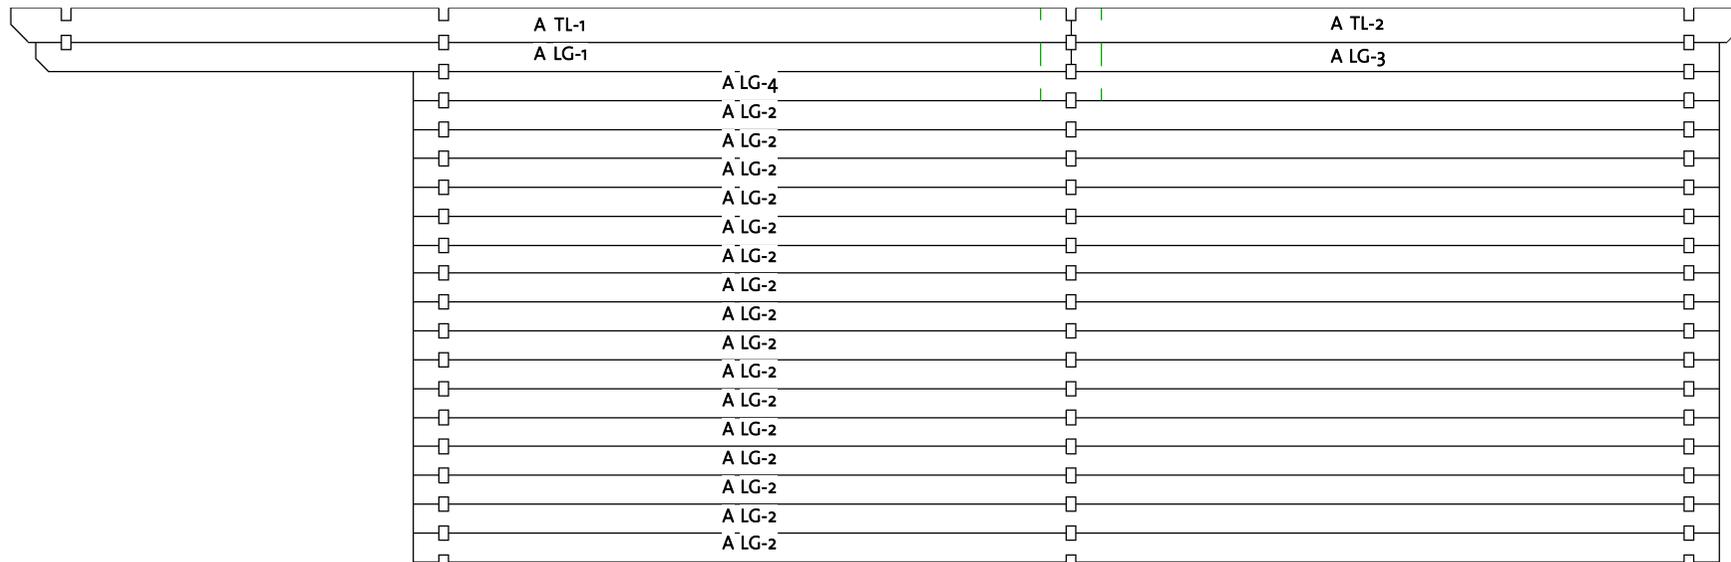

1600

5200

100


92503052_260228

Dockside Sauna 2 40 (250x500)

Wall B


Log Profile Wall B	
Profile	Profile

40X135	
40X114	

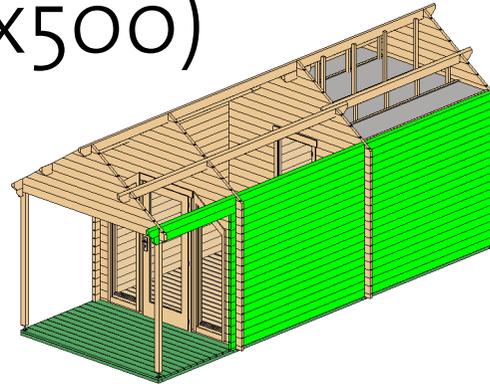

Wall B			
Mark	Profile	Count	Cut Length


BLG-1	40X114	1	4120
BLG-2	40X114	16	5200
BLG-3	40X114	1	2580
BLG-4	40X114	1	5200
BTL-1	40X135	1	4220
BTL-2	40X135	1	2680

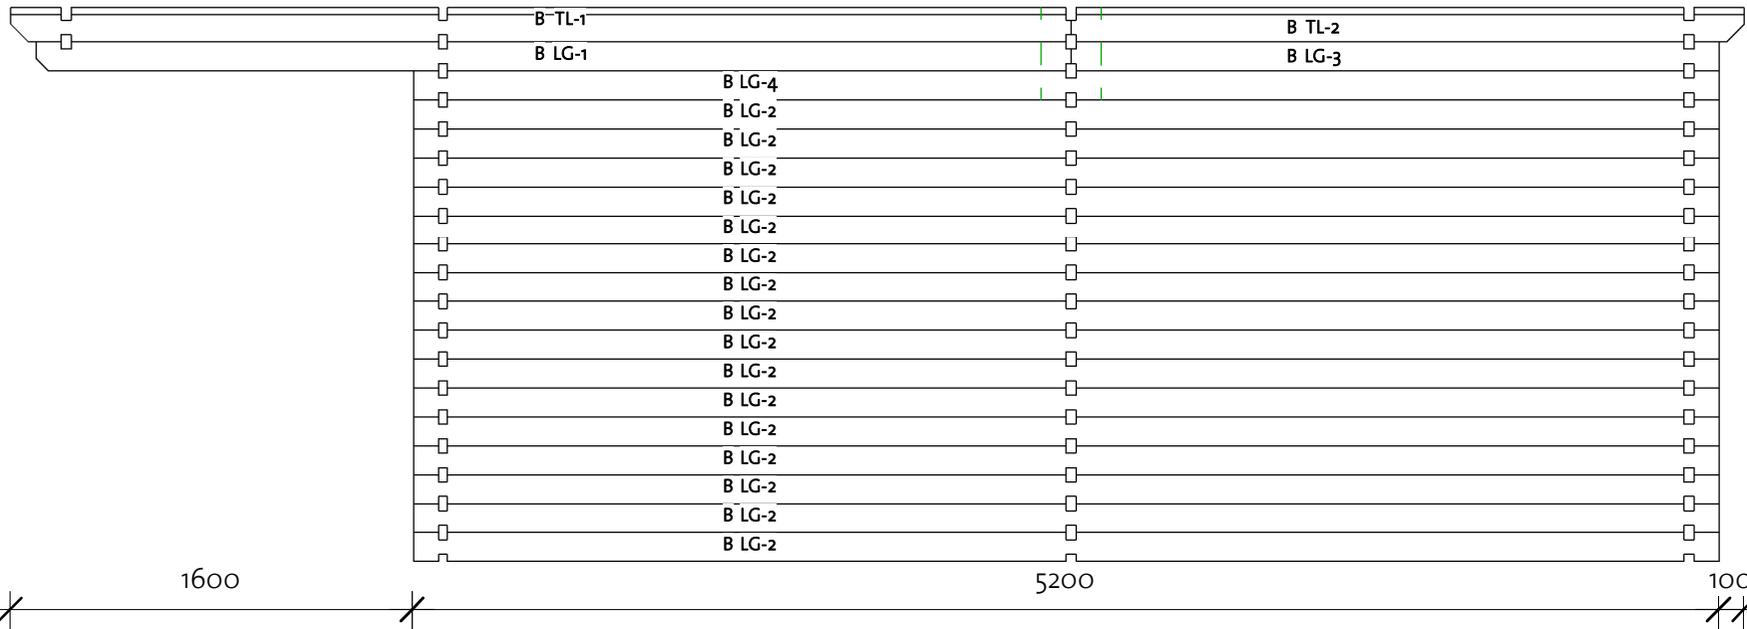

92503052_260228

Dockside Sauna 2 40 (250x500)

Roof 1

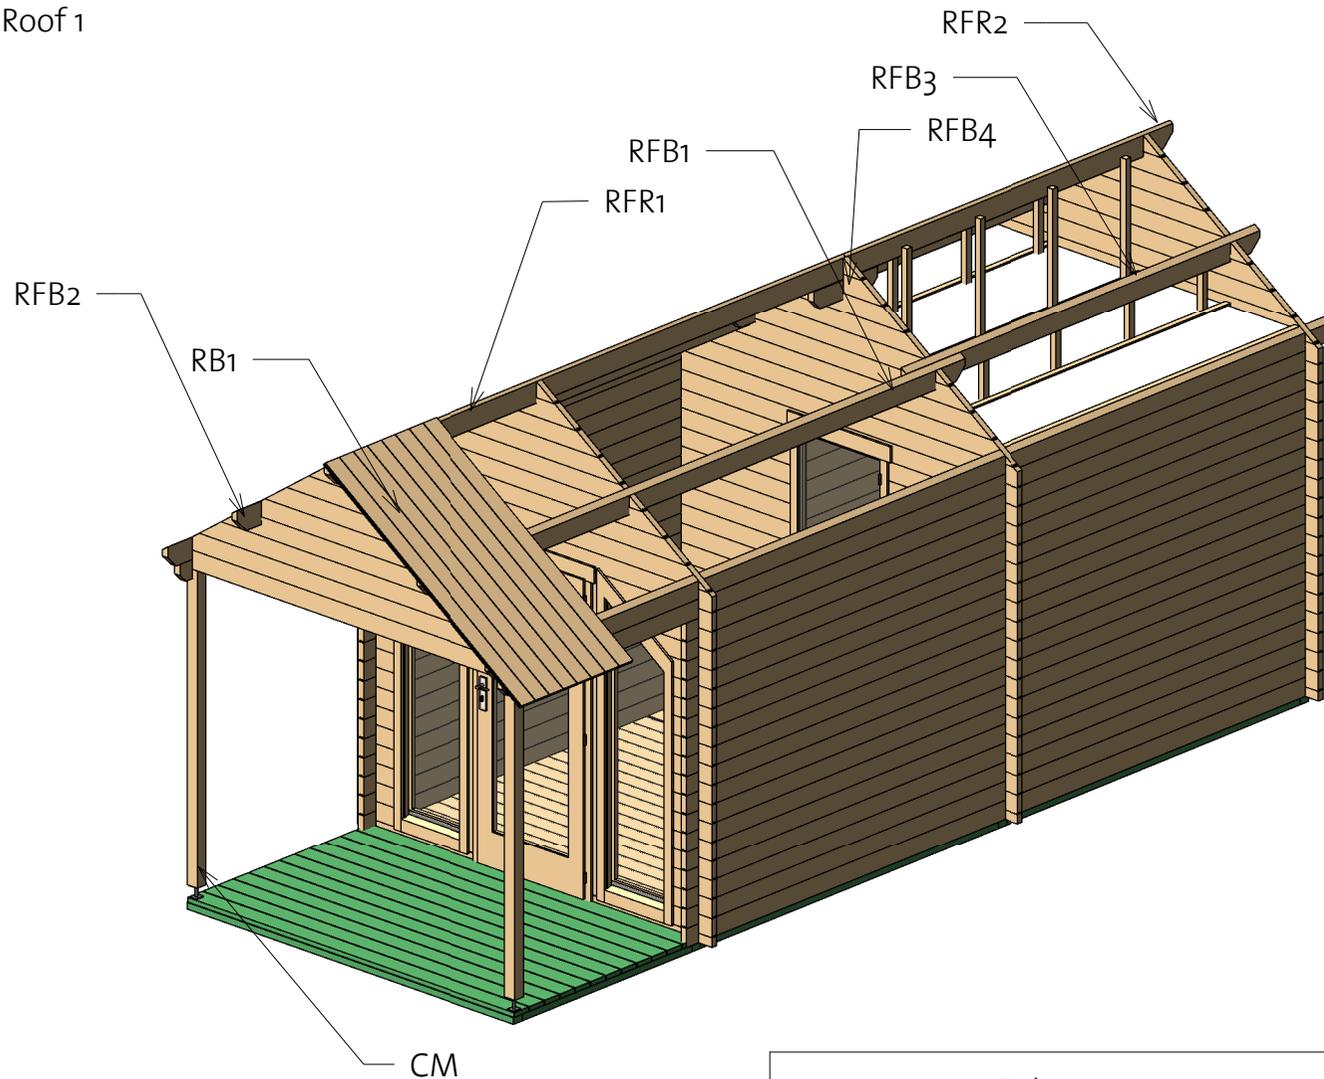


Columns			
Mark	Profile	Count	Length

CM	Post 80x70	2	1892
----	------------	---	------



Roof				
Mark	Type	Profile	Count	Length
RB	17x114		122	1818
RFB1	Beam 40x143		1	4440
RFB2	Beam 40x143		1	4440
RFB3	Beam 40x143		2	2900
RFB4	Beam 40x120		1	520
RFR1	Ridge 40x143		1	4220
RFR2	Ridge 40x143		1	2680

Dockside Sauna 2 40 (250x500)

Roof 2

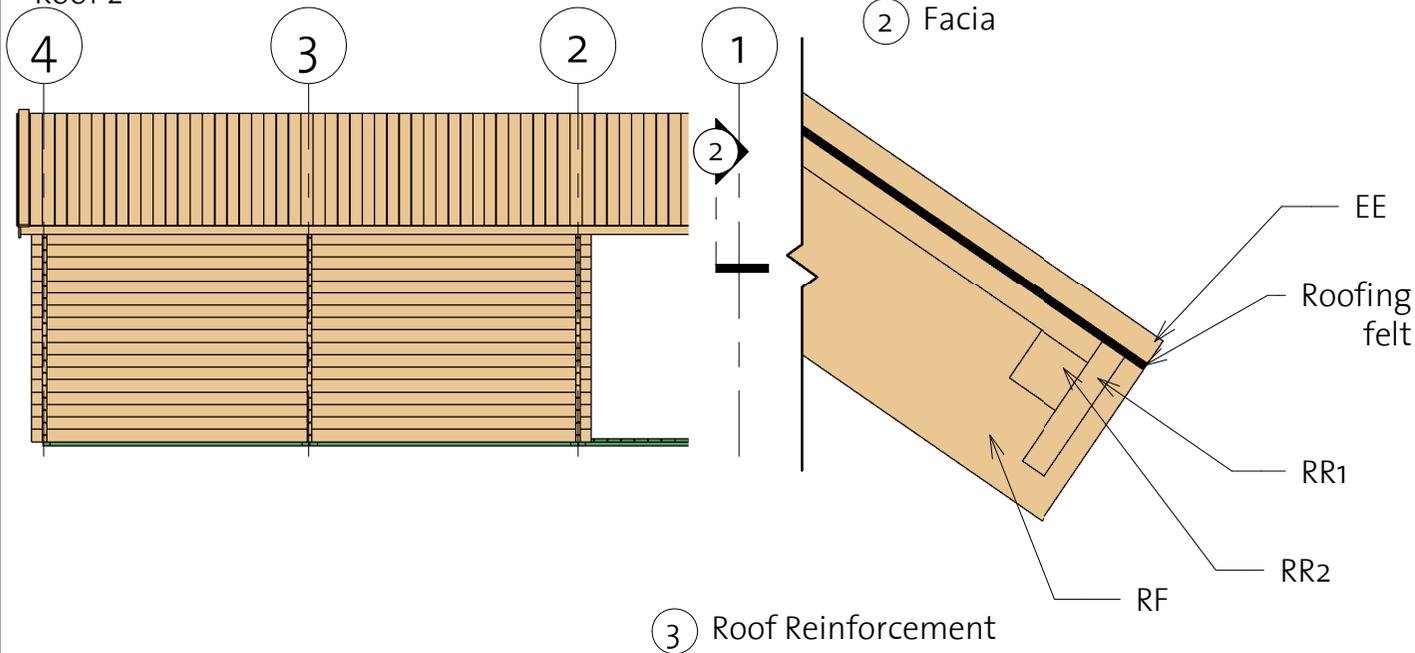

③ Roof Reinforcement

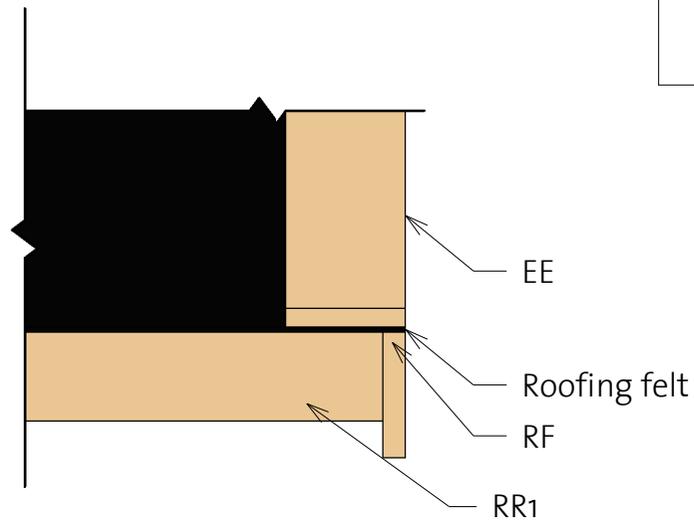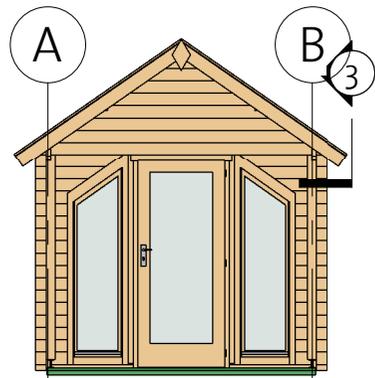


Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	1864
RF	Roof Fascia 18x120		4	1864
RR1	Roof reinforcement 18x95		4	3450
RR2	Roof reinforcement 38x38		4	3450

Dockside Sauna 2 40 (250x500)

Ceiling

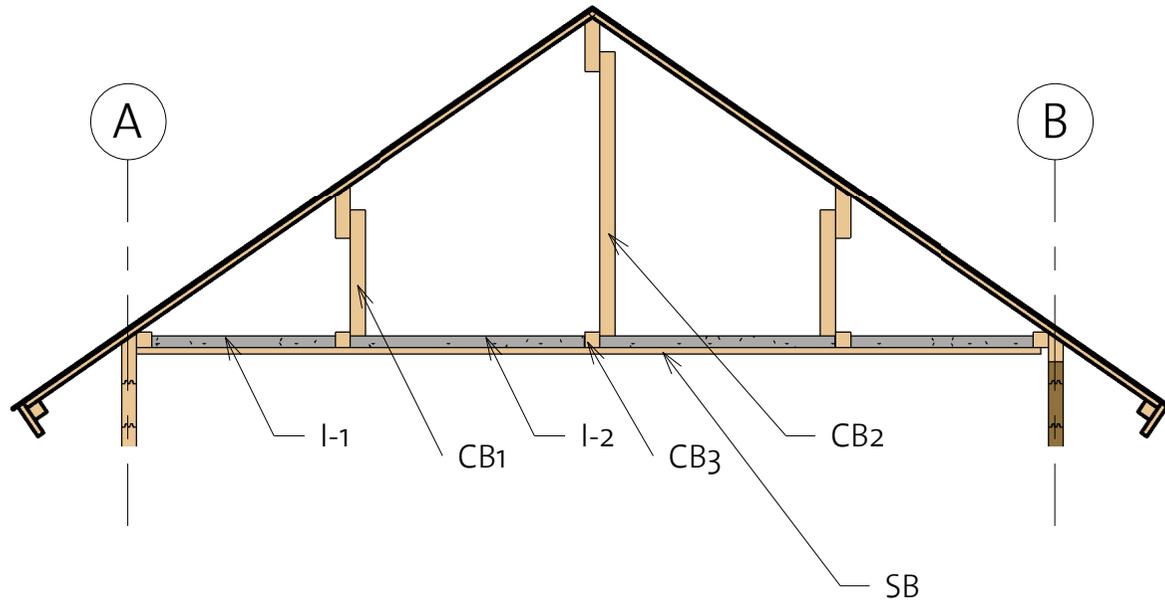

Ceiling Schedule

Mark	Type	Profile	Count	Length
CB1	40x40		8	360
CB2	40x40		4	780
CB3	40x40		5	2415
SB	15x80		31	2400

Insulation Schedule

Mark	Type	Count	Length
I-1	Insulation 486	2	2400
I-2	Insulation 622	2	2400

Dockside Sauna 2 40 (250x500)

Extras



Door Schedule				
Model	Type	Width	Height	Count
CD6R	Classic door 6 right	840	1955	1
SD	Sauna door	685	1920	1
DB	Door beam 850 mm	40	12	1

Type	Count
Romb	2




- * Windows intended for tilt opening only!
- * Fenster zur Eröffnung nur zum Kippen vorgesehen!
- * Aknad on ette nähtud ainult kaldu avamiseks!

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Adjustable post foot		2
Nails	1,4 x 40	50
Screws	5,0 x 70	60
Screws	6,0 x 140	80
Screws	4,8 x 75	120
Screws	4,0 x 40	880

Window Schedule				
Mark	Type	Width	Height	Count

CW4R	Classic window 4, right Tempered	875	1890	2
CW25	Classic window 25, Tempered	515	1890	1
CW26	Classic window 26, Tempered	515	1890	1

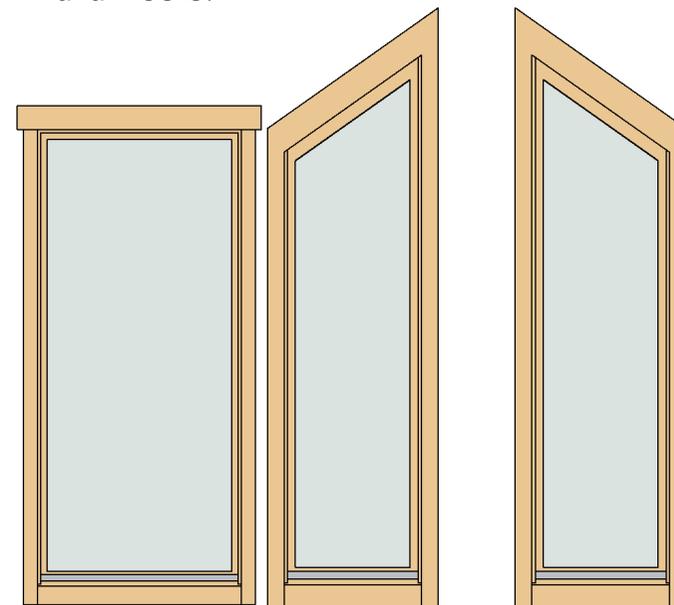

92503052_260228

Dockside Sauna 2 40 (250x500)

List of all items 1

Impregnated foundation beams

Mark	Type	Profile	Count	Length
IFB1	IFB 70x40		5	2360
IFB2	IFB 70x40		6	2490
IFB3	IFB 70x40		5	1385
IFB4	IFB 70x40		5	2335

Roof

Mark	Type	Profile	Count	Length
RB	17x114		122	1818
RFB1	Beam 40x143		1	4440
RFB2	Beam 40x143		1	4440
RFB3	Beam 40x143		2	2900
RFB4	Beam 40x120		1	520
RFR1	Ridge 40x143		1	4220
RFR2	Ridge 40x143		1	2680

92503052_260228

Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		45	2414

Terrace Schedule

TB	TB 28x120		12	2490
BB	BB 18x40		8	2500

Fascia Schedule

Mark	Type	Profile	Count	Length
EE	Eave Edging 18x95		4	1864
RF	Roof Fascia 18x120		4	1864
RR1	Roof reinforce ment 18x95		4	3450
RR2	Roof reinforce ment 38x38		4	3450

Dockside Sauna 2 40 (250x500)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1LG-1 *	40X114	1	321
1LG-2 *	40X114	1	654
1LG-3 *	40X114	1	986
1LG-4 *	40X114	1	1318
1LG-5 *	40X114	1	1650
1LG-6 *	40X114	1	1983
1LG-7 *	40X114	1	2315
1LG-8 *	40X114	1	2647
1LG-9 *	40X114	1	2700

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	2	925
2LG-1 *	40X114	1	321
2LG-2 *	40X114	1	654
2LG-3 *	40X114	1	986
2LG-4 *	40X114	1	1318
2LG-5 *	40X114	1	1650
2LG-6 *	40X114	1	1983
2LG-7 *	40X114	1	2315
2LG-8 *	40X114	1	2647
2LG-9 *	40X114	1	2700
2LG-10	40X114	26	318
2LG-11	40X114	2	835
2LG-12	40X114	2	691
2LG-13	40X114	2	528
2LG-14	40X114	2	365

Wall 3			
Mark	Profile	Count	Cut Length

3BL-1	40X57	2	1005
3LG-1 *	40X114	1	321
3LG-2 *	40X114	1	654
3LG-3 *	40X114	1	986
3LG-4 *	40X114	1	1287
3LG-5 *	40X114	1	1650
3LG-6 *	40X114	1	1983
3LG-7 *	40X114	1	2315
3LG-8 *	40X114	1	2647
3LG-9 *	40X114	1	2700
3LG-10	40X114	32	1005
3LG-11	40X114	1	2700

Wall 4			
Mark	Profile	Count	Cut Length

4BL-1	40X57	1	2700
4LG-1 *	40X114	1	321
4LG-2 *	40X114	1	654
4LG-3 *	40X114	1	986
4LG-4 *	40X114	1	1287
4LG-5 *	40X114	1	1650
4LG-6 *	40X114	1	1983
4LG-7 *	40X114	1	2315
4LG-8 *	40X114	1	2647
4LG-9 *	40X114	1	2700
4LG-10	40X114	34	300
4LG-11	40X114	17	340

* Gable - delivered premounted

Dockside Sauna 2 40 (250x500)

List of all items 3

Wall A			
Mark	Profile	Count	Cut Length

ALG-1	40X114	1	4120
ALG-2	40X114	16	5200
ALG-3	40X114	1	2580
ALG-4	40X114	1	5200
ATL-1	40X135	1	4220
ATL-2	40X135	1	2680

Wall B			
Mark	Profile	Count	Cut Length

BLG-1	40X114	1	4120
BLG-2	40X114	16	5200
BLG-3	40X114	1	2580
BLG-4	40X114	1	5200
BTL-1	40X135	1	4220
BTL-2	40X135	1	2680

Log profiles	
Profile	Profile

40X57	
40X135	
40X135	
40X114	

Columns			
Mark	Profile	Count	Length

CM	Post 80x70	2	1892
----	------------	---	------

Column schedule		
Type	Length	Count

Post 40x90	1930	2
------------	------	---

Dockside Sauna 2 40 (250x500)

List of all items 4

Insulation Schedule			
Mark	Type	Count	Length

I-1	Insulation 486	2	2400
I-2	Insulation 622	2	2400

Ceiling Schedule				
Mark	Type	Profile	Count	Length

CB1	40x40		8	360
CB2	40x40		4	780
CB3	40x40		5	2415
SB	15x80		31	2400