
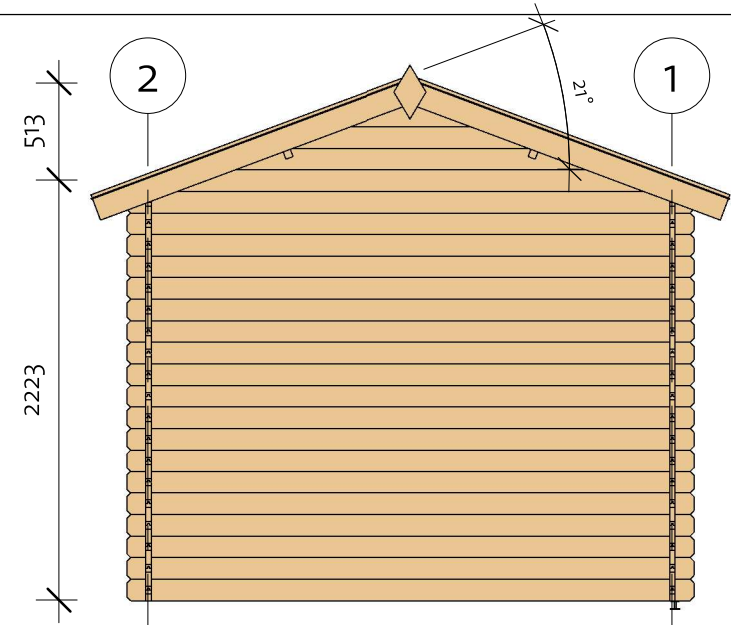



Blockhaus 28 (570x280)

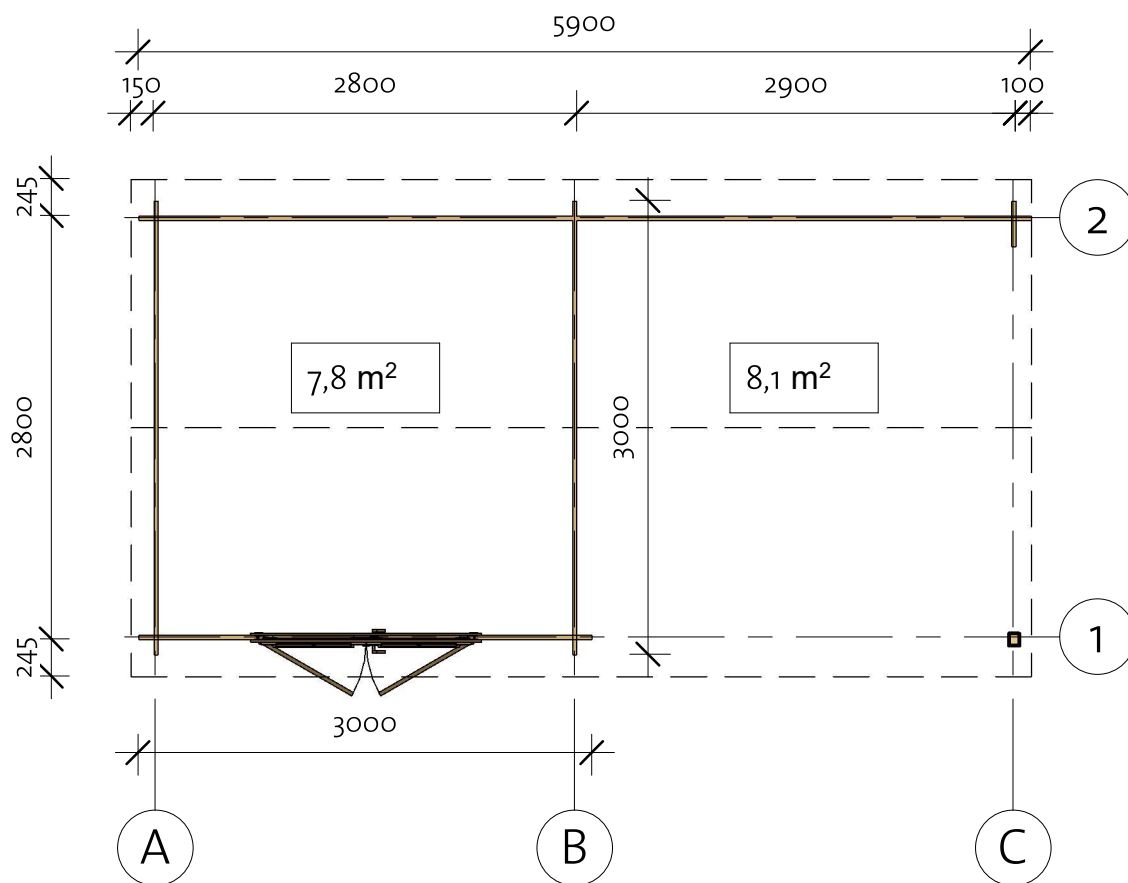

 **VIKTRÄ**


Blockhaus 28 (570x280)

Floor Plan

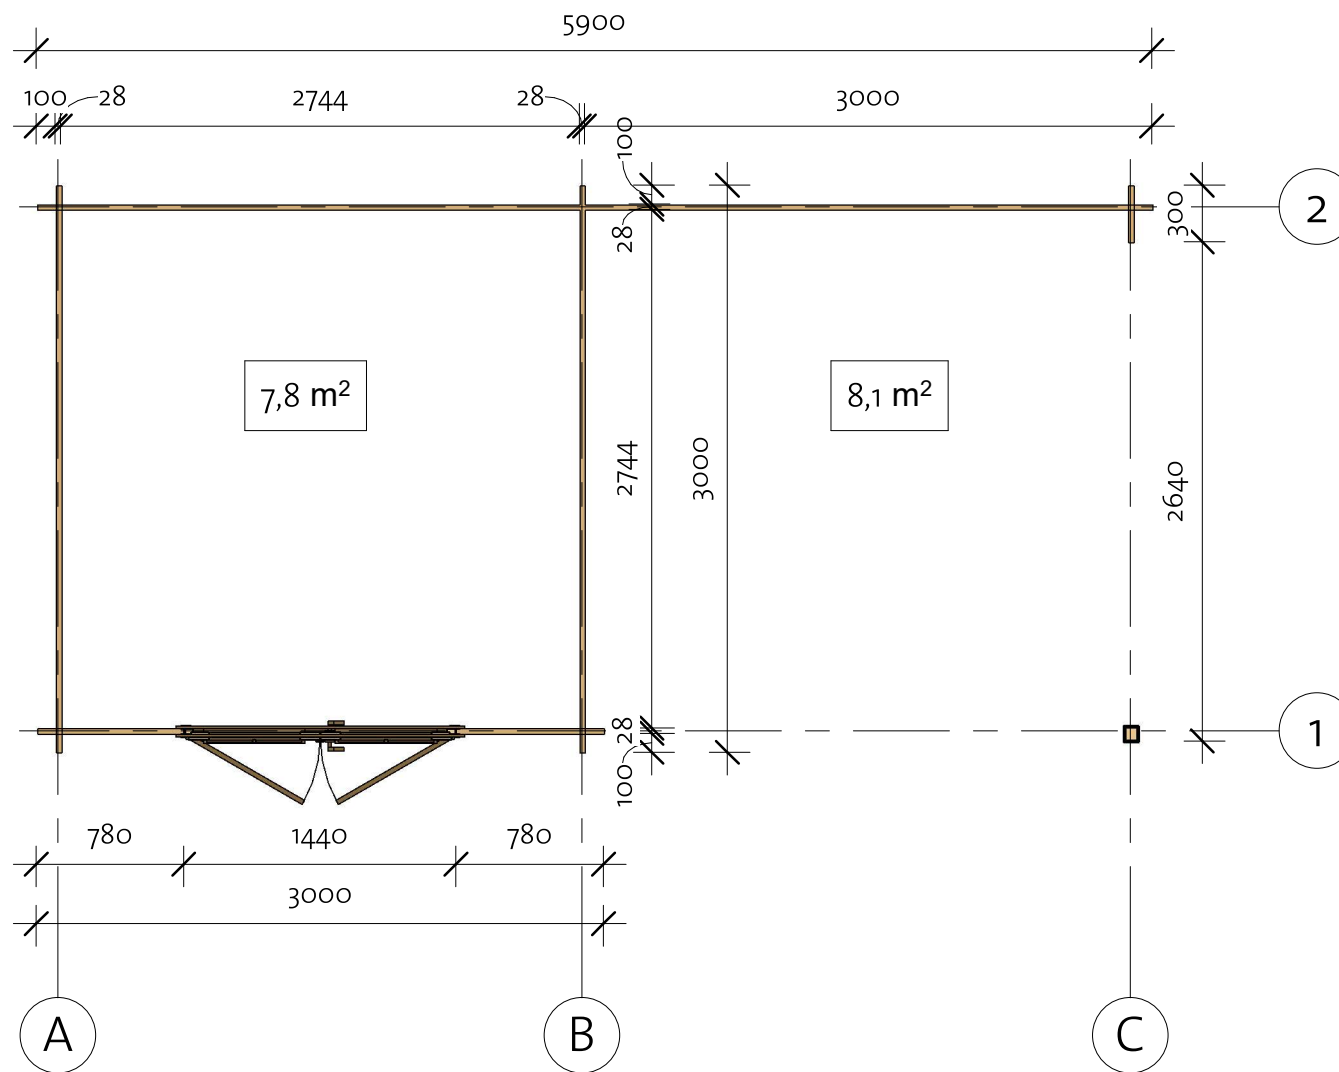


Blockhaus 28 (570x280)

Wall 1

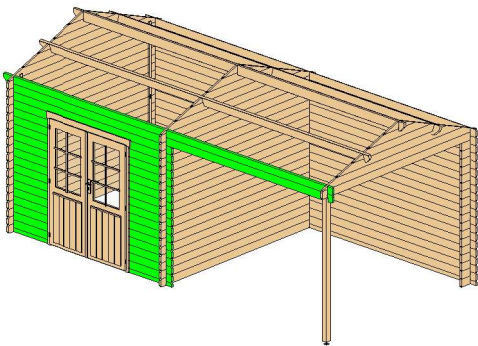

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	28x57	2	780
1LG-1	28x114	32	780
1LG-2	28x114	1	5900
1LG-3	28x114	1	3000
1TL-1	28x114	1	5950

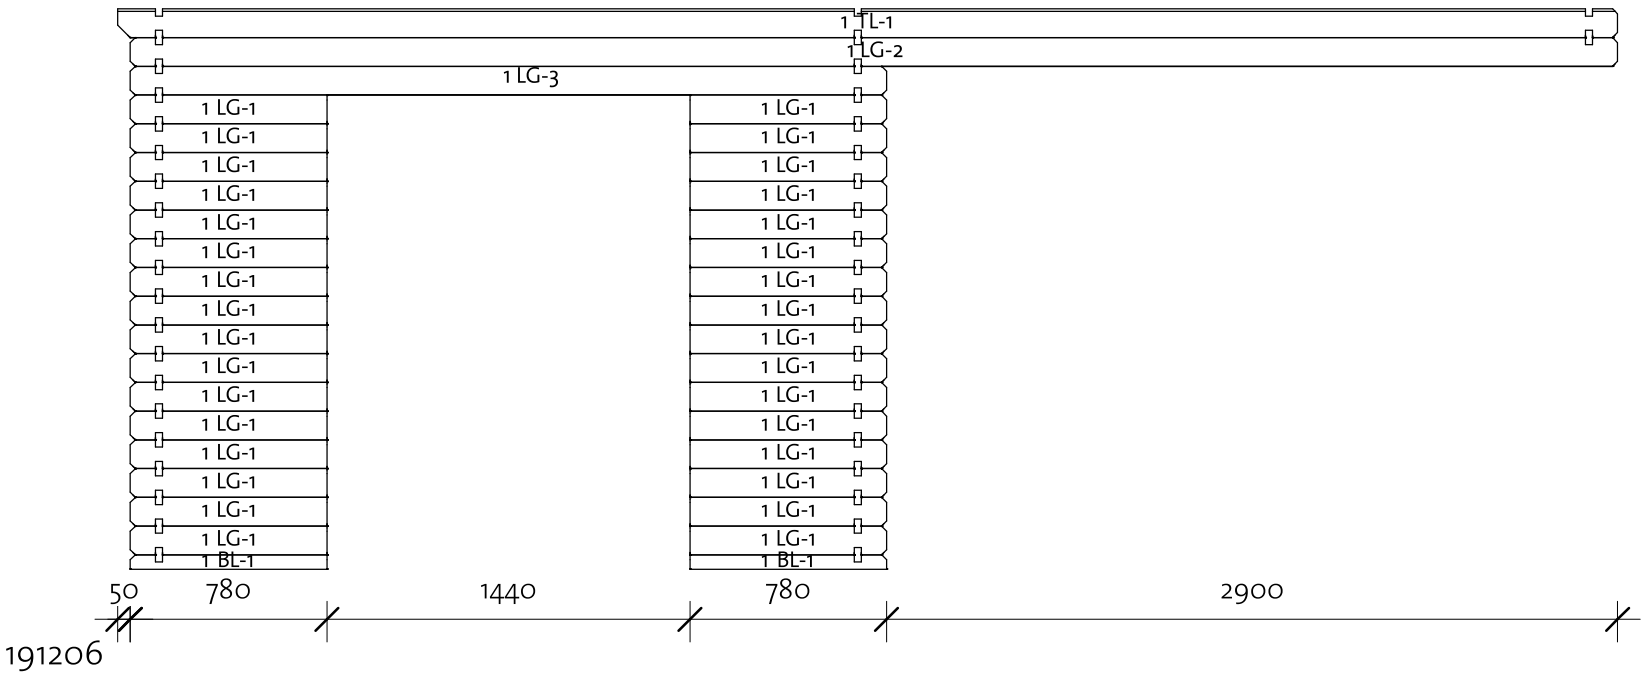


Log Profile Wall 1	
Profile	Profile

28x57	
28x114	
28x114	


Blockhaus 28 (570x280)

Wall 2

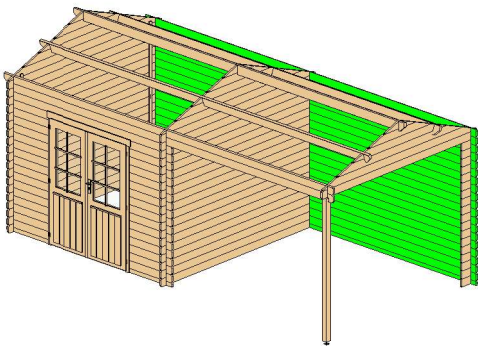

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	28x57	1	5900
2LG-1	28x114	18	5900
2TL-1	28x114	1	5950

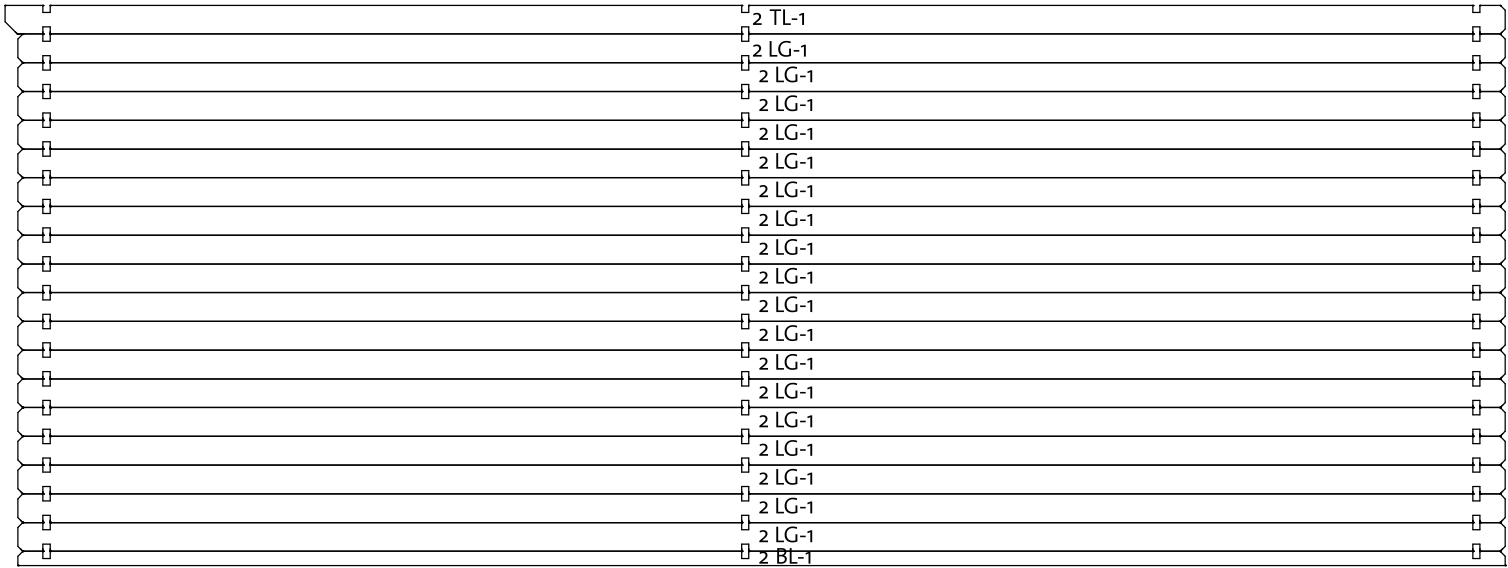


Log Profile Wall 2	
Profile	Profile

28x57	
28x114	
28x114	

Blockhaus 28 (570x280)


Wall A

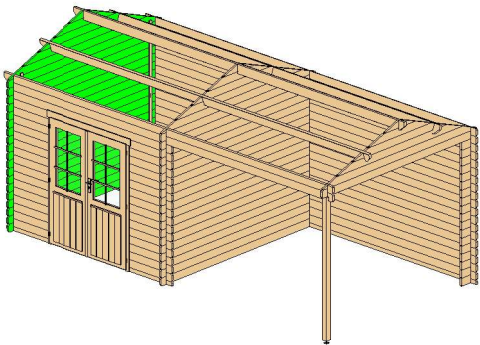

Wall A			
Mark	Profile	Count	Cut Length

ALG-1*	28x114	1	611
ALG-2*	28x114	1	1221
ALG-3*	28x114	1	1830
ALG-4*	28x114	1	2439
ALG-5*	28x114	1	2984
ALG-6	28x114	19	3000

* Gable - delivered premounted


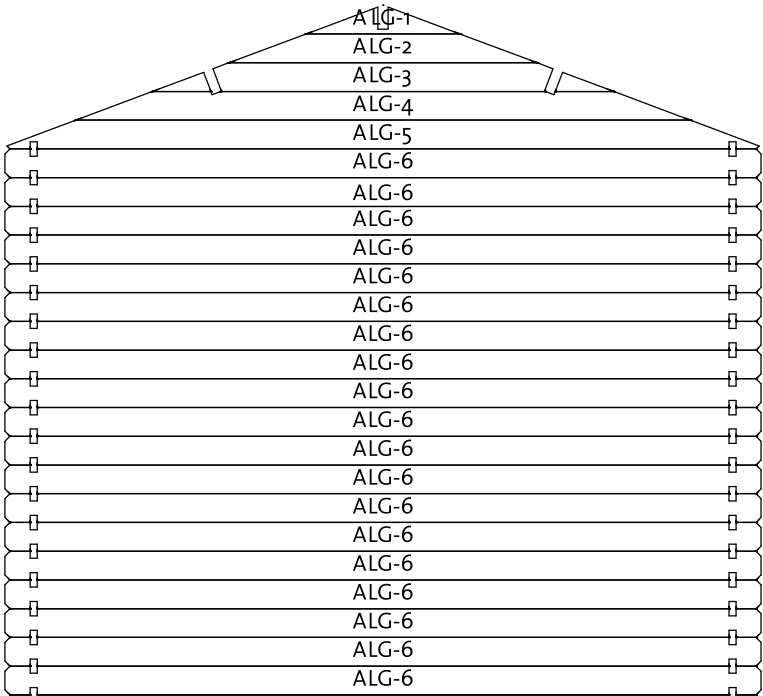


Log Profile Wall A	
Profile	Profile

28x114	
--------	--

Blockhaus 28 (570x280)

Wall B

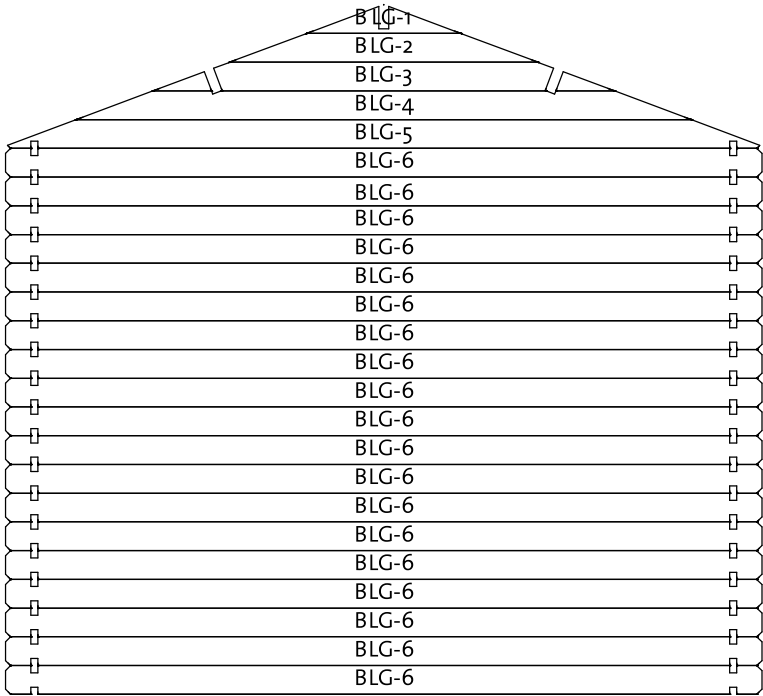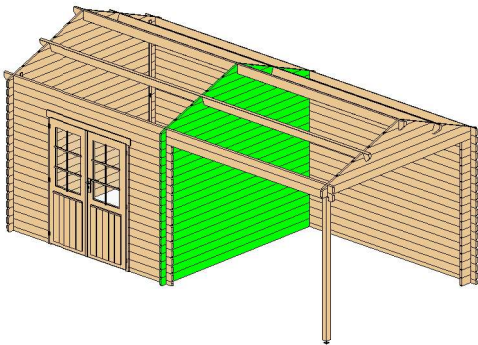

Wall B			
Mark	Profile	Count	Cut Length



BLG-1 *	28x114	1	611
BLG-2 *	28x114	1	1221
BLG-3 *	28x114	1	1830
BLG-4 *	28x114	1	2439
BLG-5 *	28x114	1	2984
BLG-6	28x114	19	3000

* Gable - delivered premounted

Log Profile Wall B	
Profile	Profile
28x114	

Blockhaus 28 (570x280)

Wall C

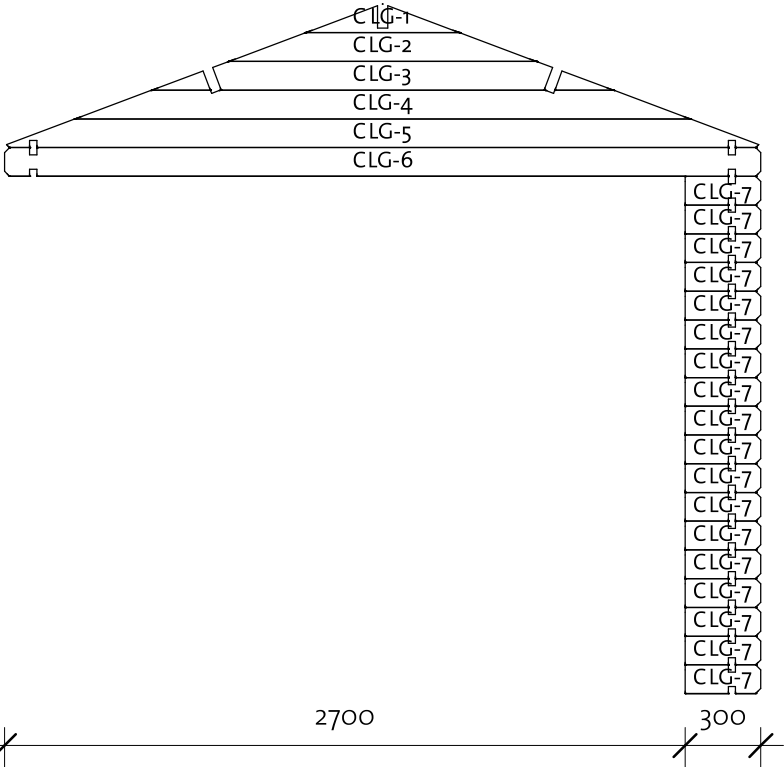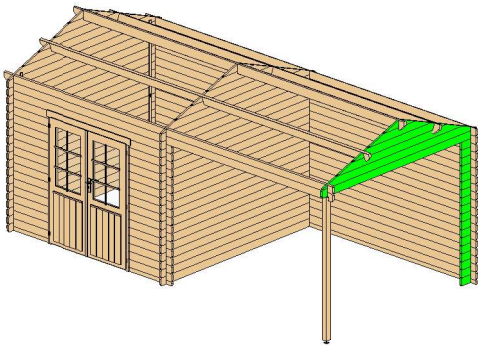

Wall C			
Mark	Profile	Count	Cut Length

CLG-1*	28x114	1	611
CLG-2*	28x114	1	1221
CLG-3*	28x114	1	1830
CLG-4*	28x114	1	2439
CLG-5*	28x114	1	2984
CLG-6	28x114	1	3000
CLG-7	28x114	18	300

* Gable - delivered premounted


Log Profile Wall C	
Profile	Profile

28x114



Blockhaus 28 (570x280)

Roof 1

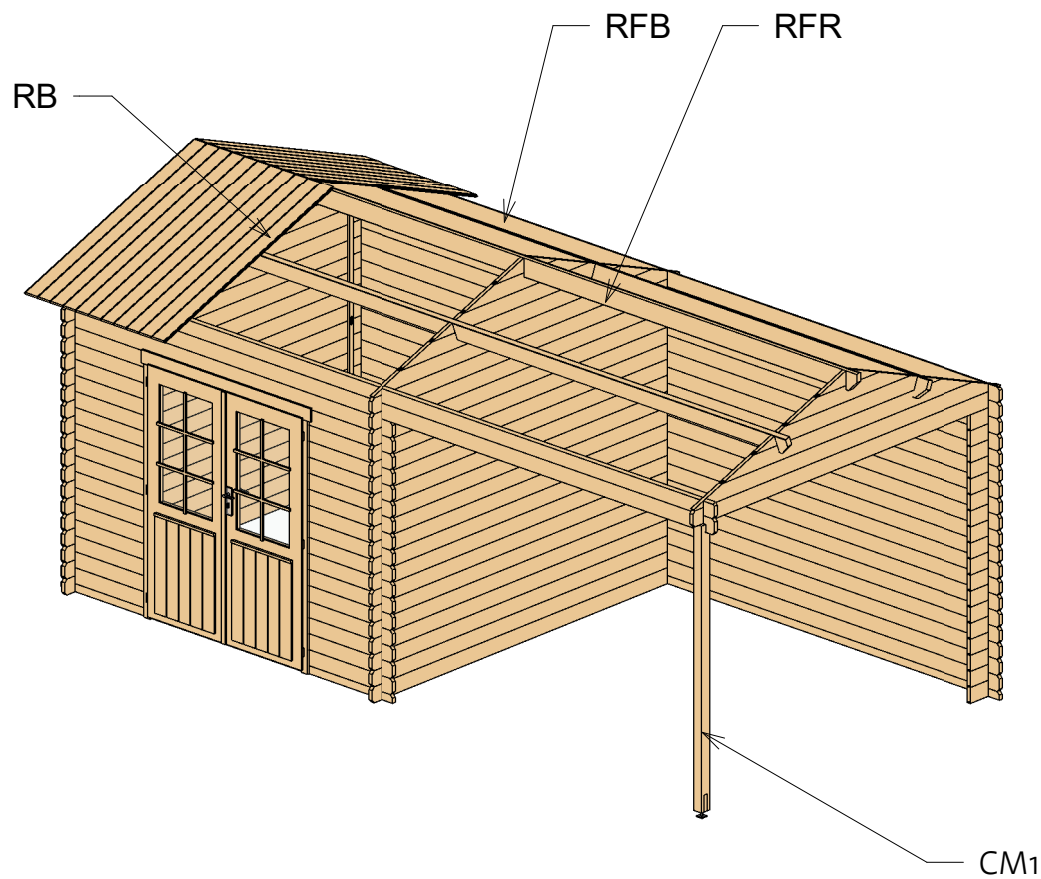


Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40x143		1	5950
RFB	Beam 40x143		2	5950
RB	17x114		108	1750



Column schedule			
Mark	Type	Length	Count
CM1	Post 80x70	2052	1

Blockhaus 28 (570x280)


Roof 2

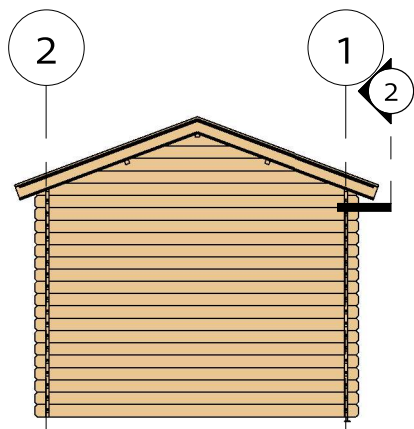

2 Roof Reinforcement

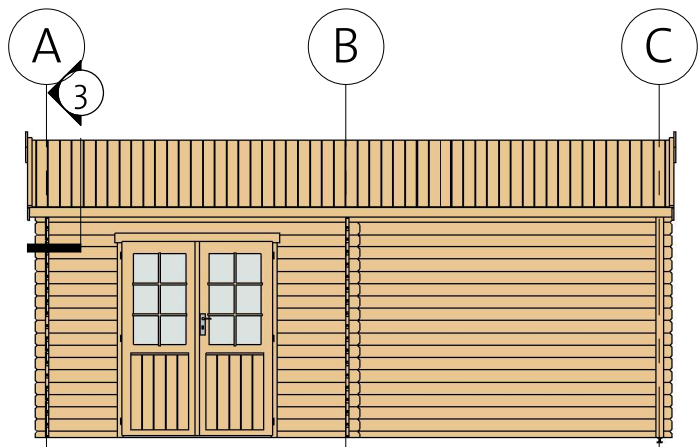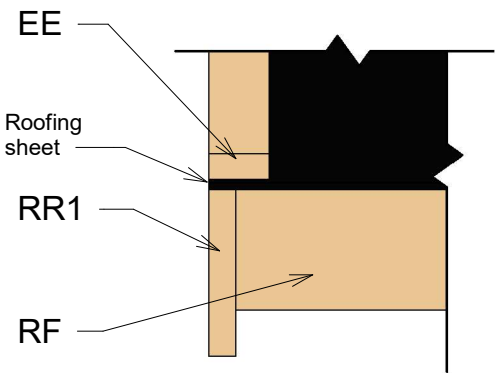


3 Facia

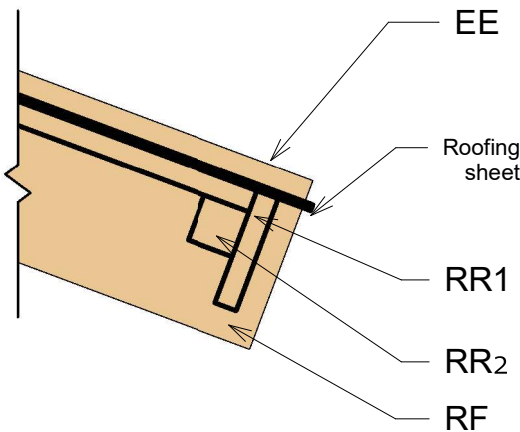

Fascia Schedule				
Mark	Type	Profile	Count	Length
EE	Eave Edging 18x40		4	1795
RF	Roof Fascia 18x120		4	1795
RR1	Roof reinforcement 18x95		2	5950
RR2	Roof reinforcement 38x38		2	5950

Blockhaus 28 (570x280)

List of all items 1

	RFB	Beam 40x143			2	5950
	RFR	Ridge 40x143			1	5950
1	TL-1	Log 28x114			1	5950
2	TL-1	Log 28x114			1	5950
2	BL-1	Log 28x57			1	5900
2	LG-1	Log 28x114			18	5900
1	LG-2	Log 28x114			1	5900
1	LG-3	Log 28x114			1	3000
A	LG-6				19	3000
B	LG-6	Log 28x114			19	3000
C	LG-6	Log 28x114			1	3000
	RB	17x114			108	1750
1	BL-1	Log 28x57			2	780
1	LG-1	Log 28x114			32	780
C	LG-7	Log 28x114			18	300

RR1	Roof reinforce ment 18x95		2	5950
RR2	Roof reinforce ment 38x38		2	5950
EE	Eave Edging 18x40		4	1795
RF	Roof Fascia 18x120		4	1795


CM1	Post 80x70		1	2052
-----	------------	---	---	------

Windboard 18x40		5	2200
-----------------	---	---	------


Blockhaus 28 (570x280)

List of all items 2


1 Gable A



3 Gable C



2 Gable B




Romb	2
------	---



Adjustable post foot	1	45
----------------------	---	----



Door Schedule				
Model	Type	Width	Height	Count
BDD5R	Basic double door 5 right	1425	1835	1
DCB6	Door Crossbar 6	--	--	2



Hitblock	300-400 mm		
Bolts	M8x60		15
Screws	5,0 x 70		20
Screws	6,0 x 140		25
Screws	4,0 x 40		455