




Brantevik II 40 (360x360)

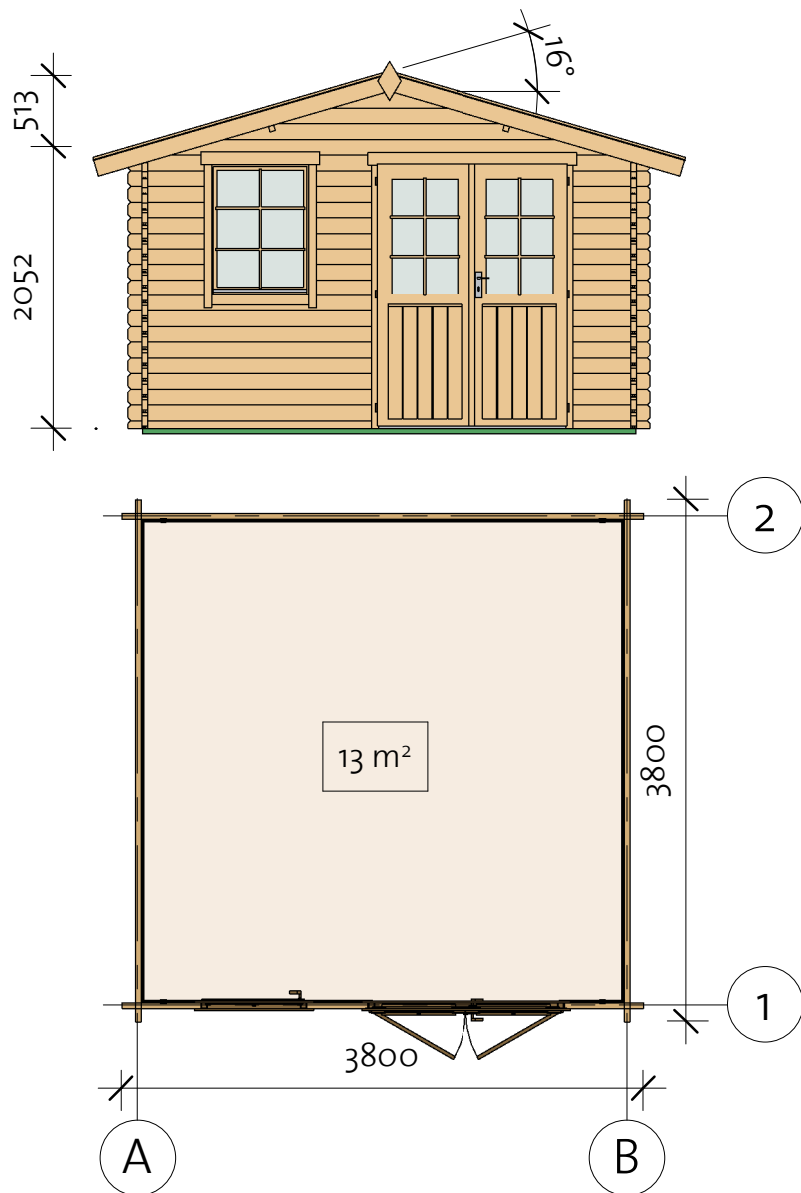

Brantevik II 40 (360x360)

Foundation


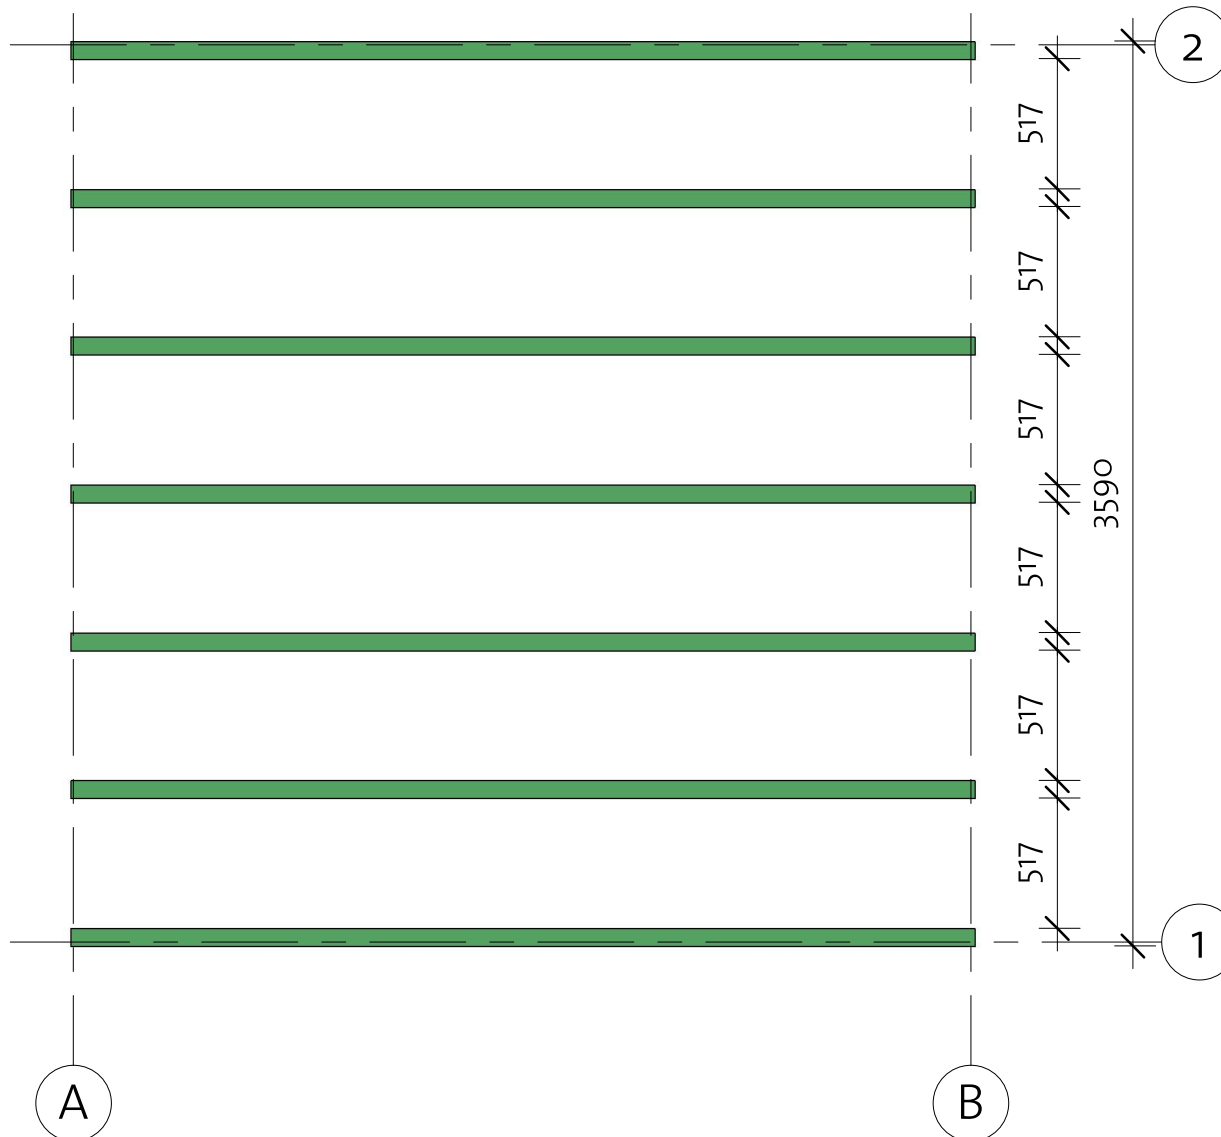


Impregnated foundation beams				
Mark	Type	Profile	Count	Length
IFB	IFB 70x40		7	3590



Brantevik II 40 (360x360)

Floor Plan

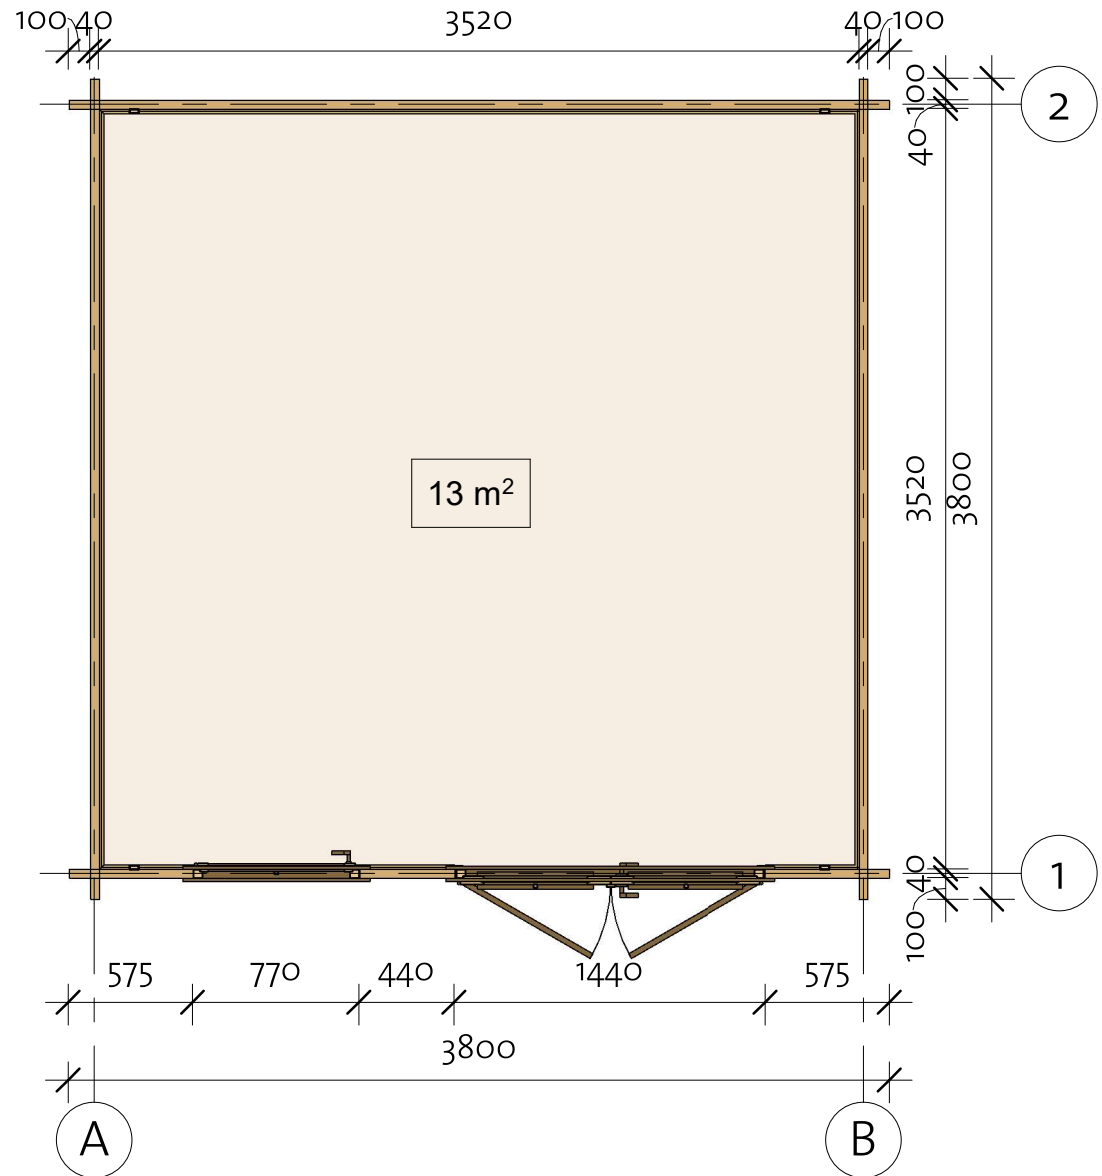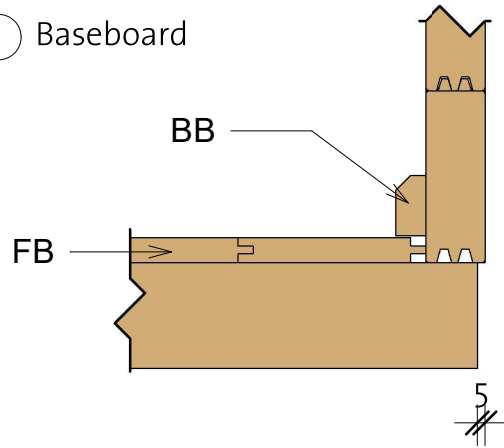① Baseboard





Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		32	3515
BB	BB 20x40		4	3600

Brantevik II 40 (360x360)

Wall 1

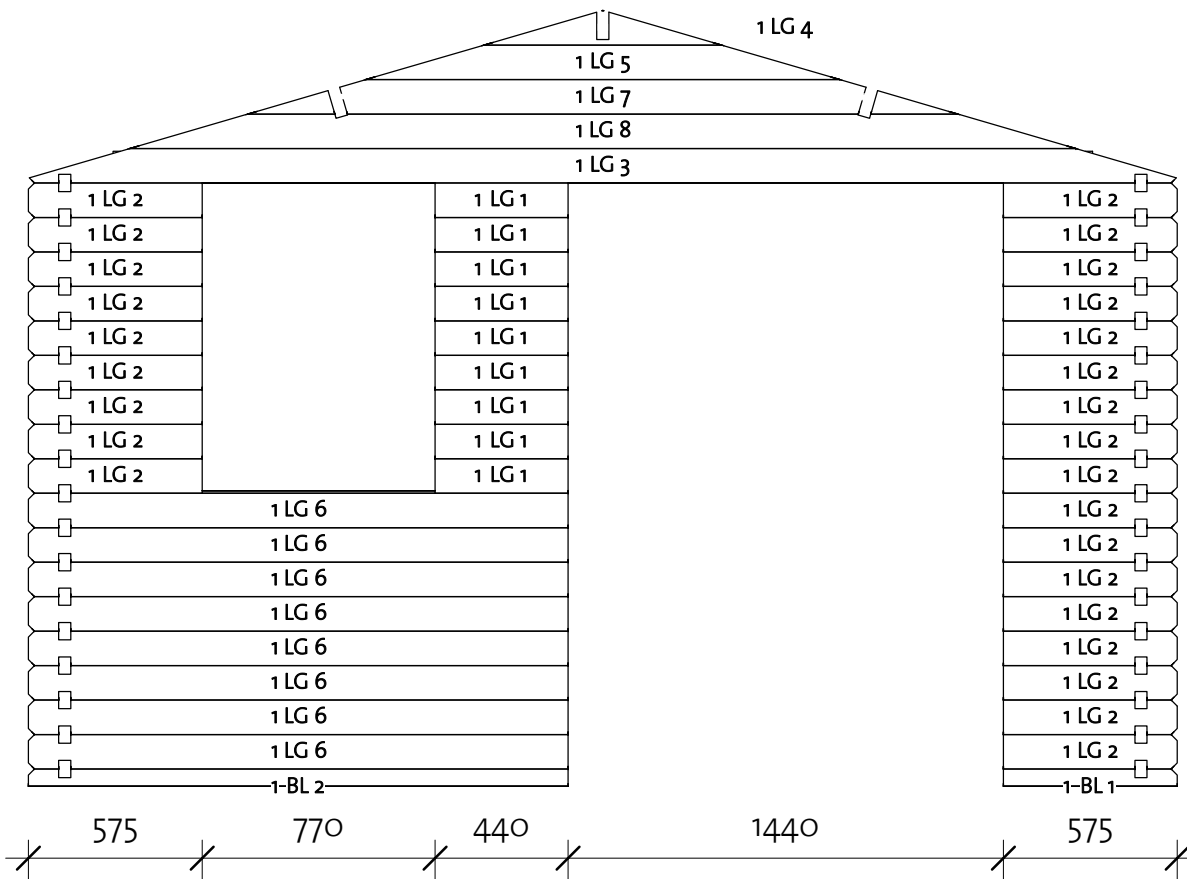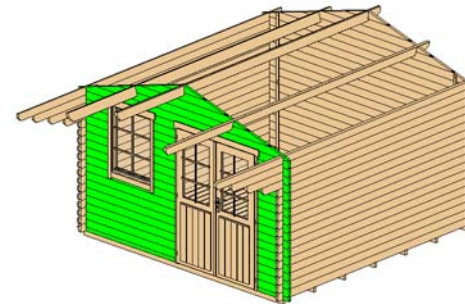



Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	1	575
1BL 2	40X57	1	1785
1LG 1	40X114	9	440
1LG 2	40X114	26	575
1LG 3*	40X114	1	3794
1LG 4*	40X114	1	787
1LG 5*	40X114	1	1568
1LG 6	40X114	8	1785
1LG 7*	40X114	1	2349
1LG 8*	40X114	1	3130


*Gable-delivered premounted

Log Profile Wall 1	
Profile	Profile

40X114	
40X57	

Brantevik II 40 (360x360)


Wall 2

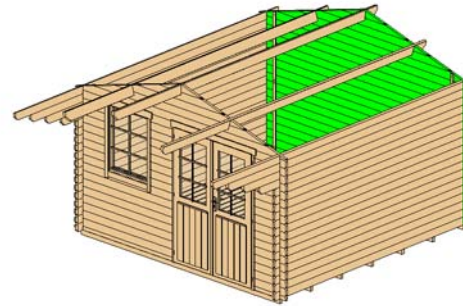

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40x57	1	3800
2LG 1*	40x114	1	787
2LG 2*	40x114	1	1568
2LG 3*	40x114	1	2349
2LG 4*	40x114	1	3130
2LG 5*	40x114	1	3794
2LG 6	40x114	17	3800

*Gable-delivered premounted

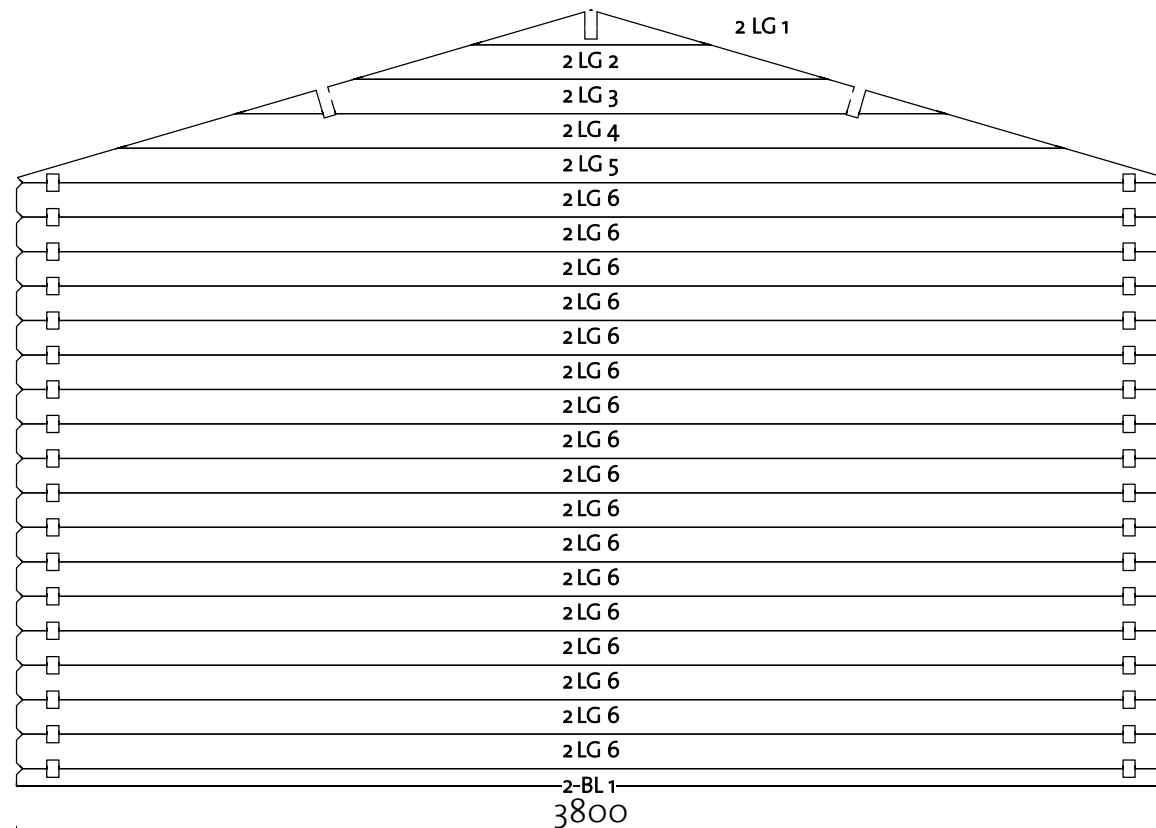


Log Profile Wall 2	
Profile	Profile

40x57	
40x114	


Brantevik II 40 (360x360)

Wall A

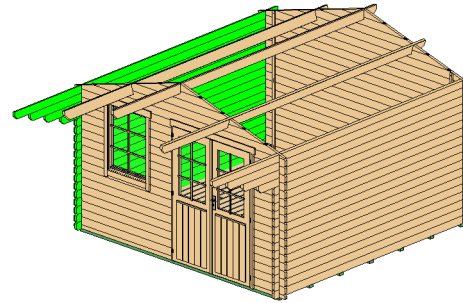

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40x114	14	3800
ALG 2	40x114	1	4100
ALG 3	40x114	1	4400
ALG 4	40x114	1	4700
ATL 1	40x114	1	5100

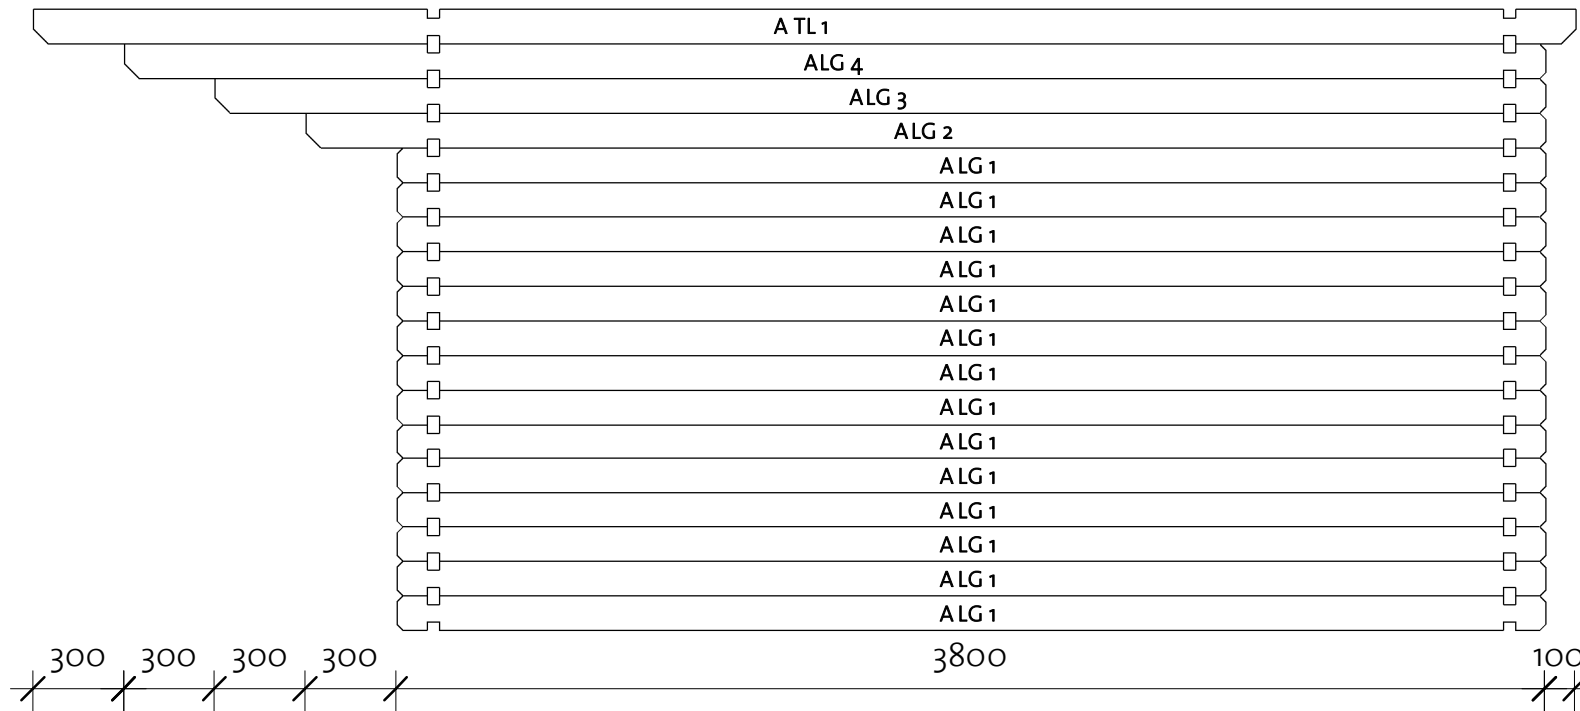


Log Profile Wall A	
Profile	Profile

40x114	
40x114	


Brantevik II 40 (360x360)

Wall B

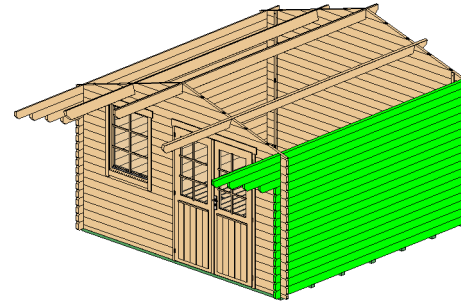

Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40x114	14	3800
BLG 2	40x114	1	4100
BLG 3	40x114	1	4400
BLG 4	40x114	1	4700
BTL 1	40x114	1	5100

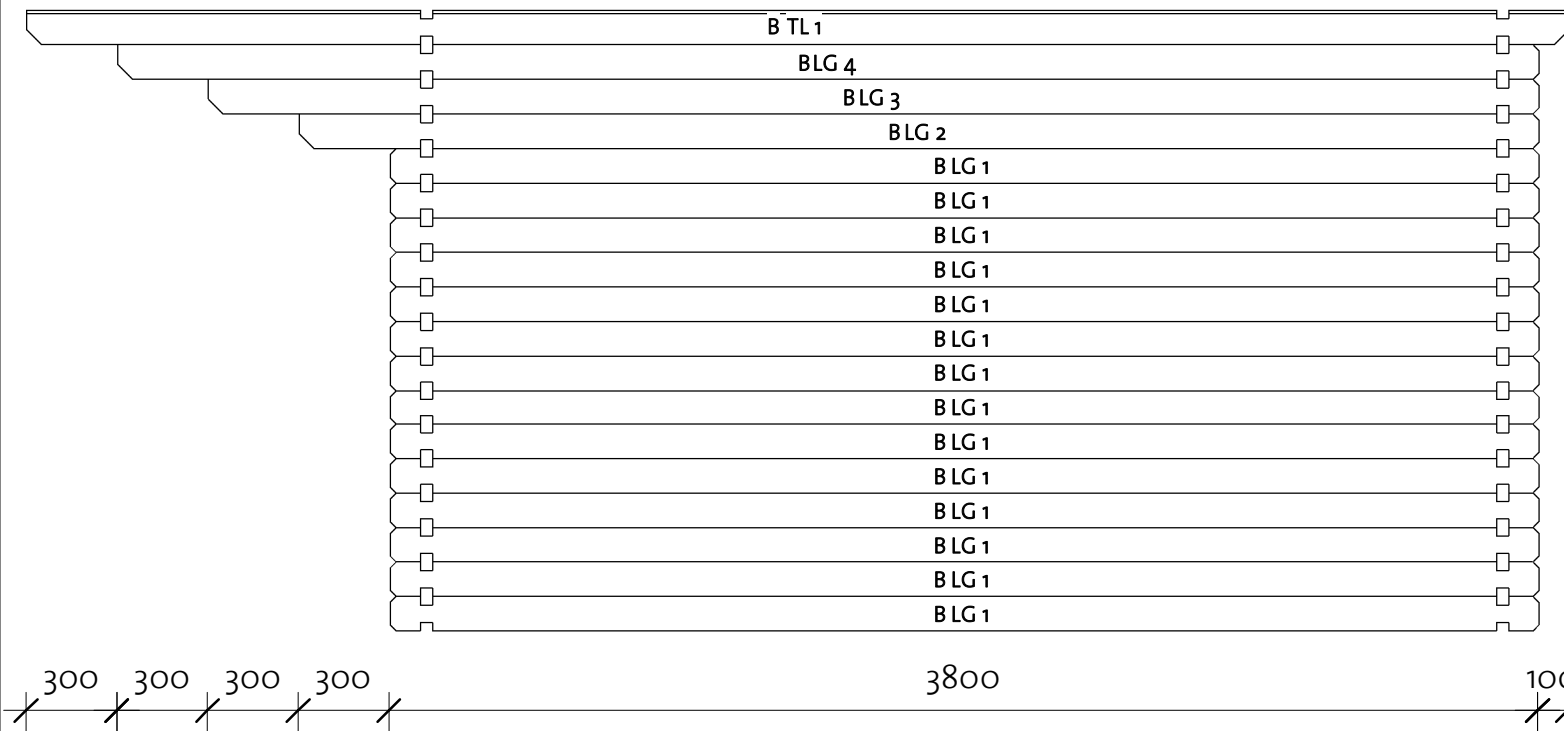





Log Profile Wall B	
Profile	Profile

40x114	
40x114	

Brantevik II 40 (360x360)

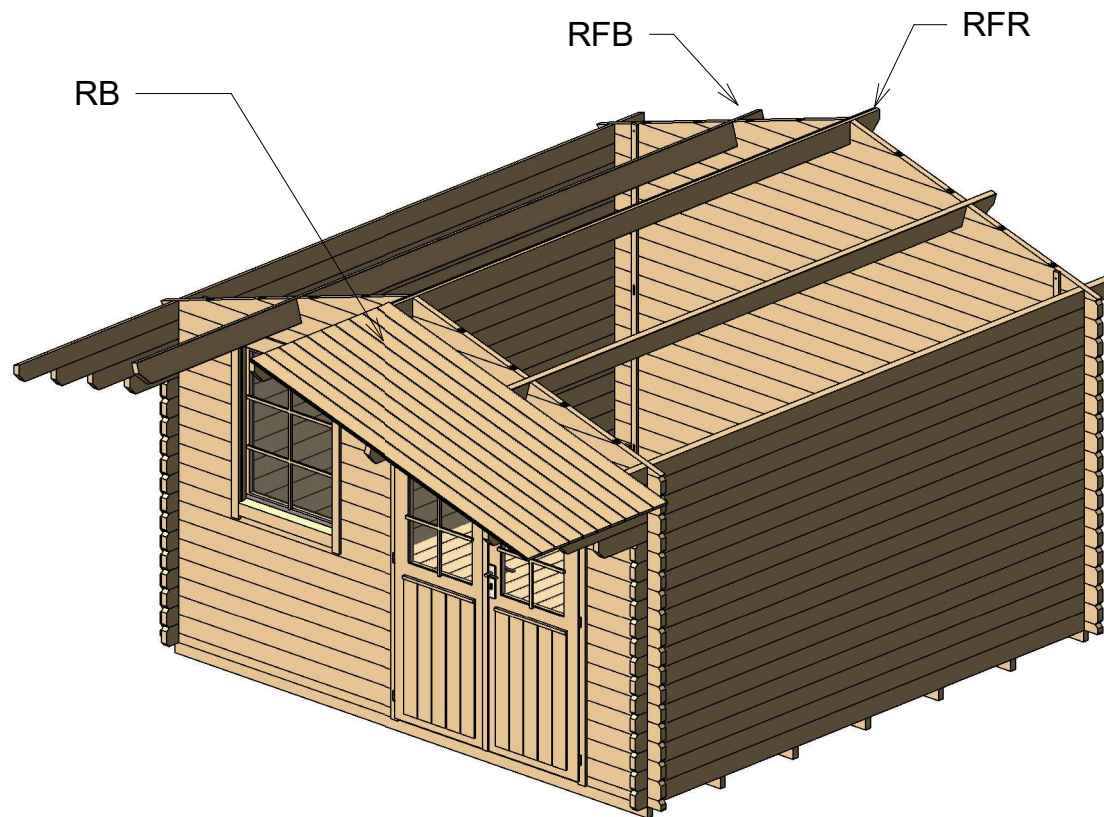Roof 1





Roof				
Mark	Type	Profile	Count	Length
RFR	Ridge 40X143		1	5100
RFB	Beam 40X143		2	5100
RB	17X114		92	2197

Brantevik II 40 (360x360)


Roof 2

② Facia

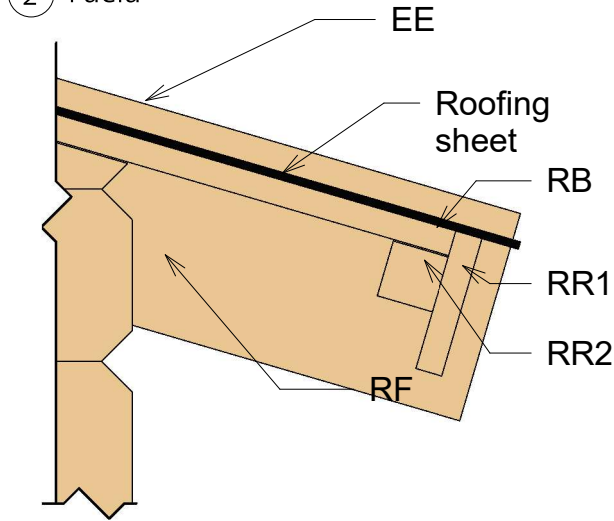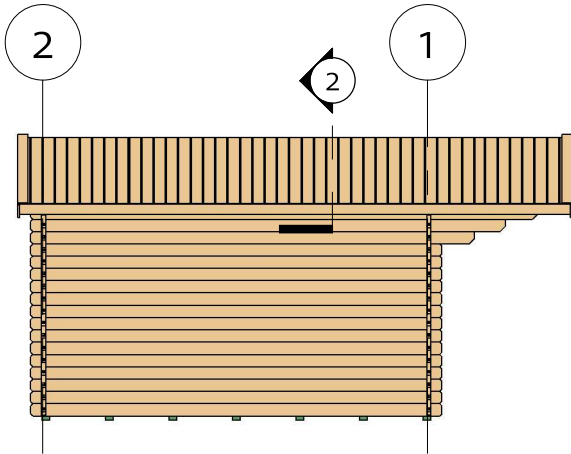


Fascia Schedule				
Mark	Type	Profile	Count	Length

EE	Eave Edging 18x95		4	2240
RF	Roof Fascia 18x120		4	2240
RR1	Roof reinforcement 18x95		2	5100
RR2	Roof reinforcement 38x38		2	5100

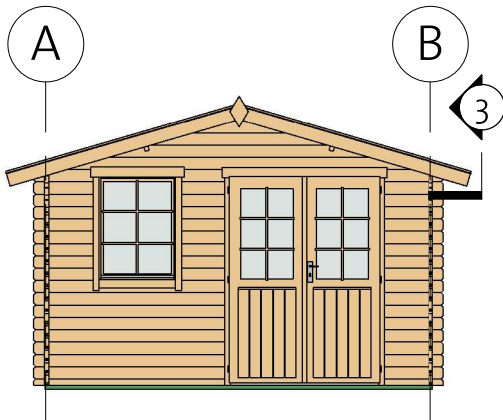

③ Roof Reinforcement

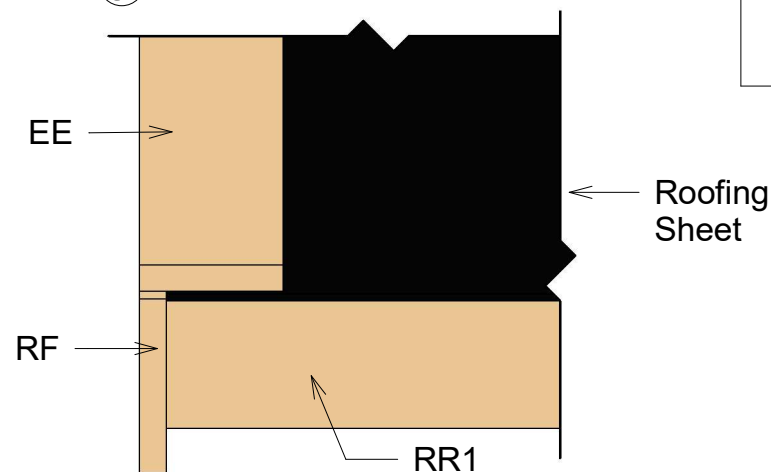


Brantevik II 40 (360x360)

Extras



Door Schedule				
Model	Type	Width	Height	Count
CDD1R	Classic double door 1 right	1425	1955	1
DCB6	Door crossbar 6	--	--	2



Window Schedule				
Model	Type	Width	Height	Count
CW1R	Classic window 1 right	765	990	1
WCB6	Window crossbar 6	--	--	1

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Screws	5,0 x 70	10
Bolts	M8 x 70	12
Screws	6,0 x 140	30
Nails	1,4 x 40	30
Screws	4,0 x 40	75
Screws	4,0 x 50	540



Type	Count	Lenght
Windboard 18x40	4	2200




Family	Count
Romb	2

Brantevik II 40 (360x360)

List of all items 1


Impregnated foundation beams


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

IFB	IFB 70x40		7	3590
-----	-----------	-----------------------------------------------------------------------------------	---	------

Floor Schedule


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


FB	FB 17x114		32	3515
----	-----------	-------------------------------------------------------------------------------------	----	------


BB	BB 20x40		4	3600
----	----------	-------------------------------------------------------------------------------------	---	------

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


RFR	Ridge 40x143		1	5100
-----	--------------	-------------------------------------------------------------------------------------	---	------


RFB	Beam 40x143		2	5100
-----	-------------	-------------------------------------------------------------------------------------	---	------


RB	17x114		92	2197
----	--------	-------------------------------------------------------------------------------------	----	------


Fascia Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE	Eave Edging 18x95		4	2240
----	-------------------	---------------------------------------------------------------------------------------	---	------

RF	Roof Fascia 18x120		4	2240
----	--------------------	---------------------------------------------------------------------------------------	---	------

RR1	Roof reinforcement 18x95		2	5100
-----	--------------------------	---------------------------------------------------------------------------------------	---	------

RR2	Roof reinforcement 38x38		2	5100
-----	--------------------------	---------------------------------------------------------------------------------------	---	------

Brantevik II 40 (360x360)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL 1	40X57	1	575
1BL 2	40X57	1	1785
1LG 1	40X114	9	440
1LG 2	40X114	26	575
1LG 3*	40X114	1	3794
1LG 4*	40X114	1	787
1LG 5*	40X114	1	1568
1LG 6	40X114	8	1785
1LG 7*	40X114	1	2349
1LG 8*	40X114	1	3130

Wall 2			
Mark	Profile	Count	Cut Length

2BL 1	40X57	1	3800
2LG 1*	40X114	1	787
2LG 2*	40X114	1	1568
2LG 3*	40X114	1	2349
2LG 4*	40X114	1	3130
2LG 5*	40X114	1	3794
2LG 6	40X114	17	3800

*Gable-delivered premounted

Wall A			
Mark	Profile	Count	Cut Length

ALG 1	40X114	14	3800
ALG 2	40X114	1	4100
ALG 3	40X114	1	4400
ALG 4	40X114	1	4700
ATL 1	40X114	1	5100


Wall B			
Mark	Profile	Count	Cut Length

BLG 1	40X114	14	3800
BLG 2	40X114	1	4100
BLG 3	40X114	1	4400
BLG 4	40X114	1	4700
BTL 1	40X114	1	5100

Log Profiles	
Profile	Profile

40X57	
40X114	

Log Profiles	
Profile	Profile

40X114	
--------	---------------------------------------------------------------------------------------