





Cleo 40 (400x300)

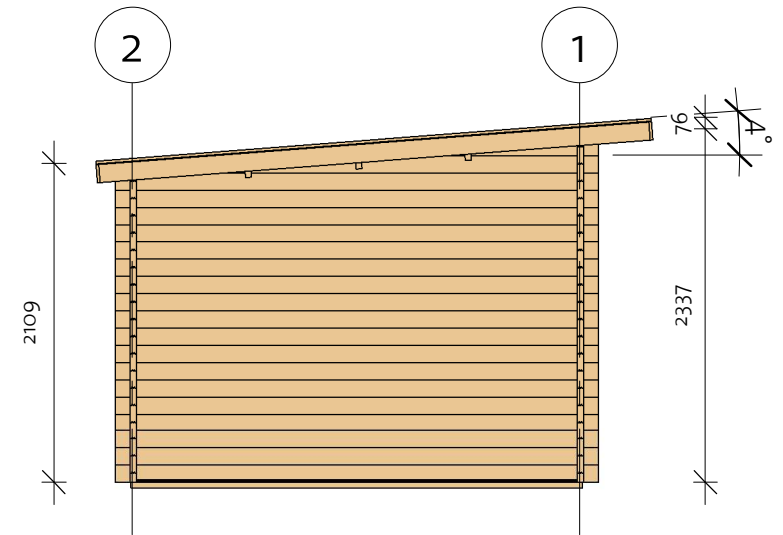

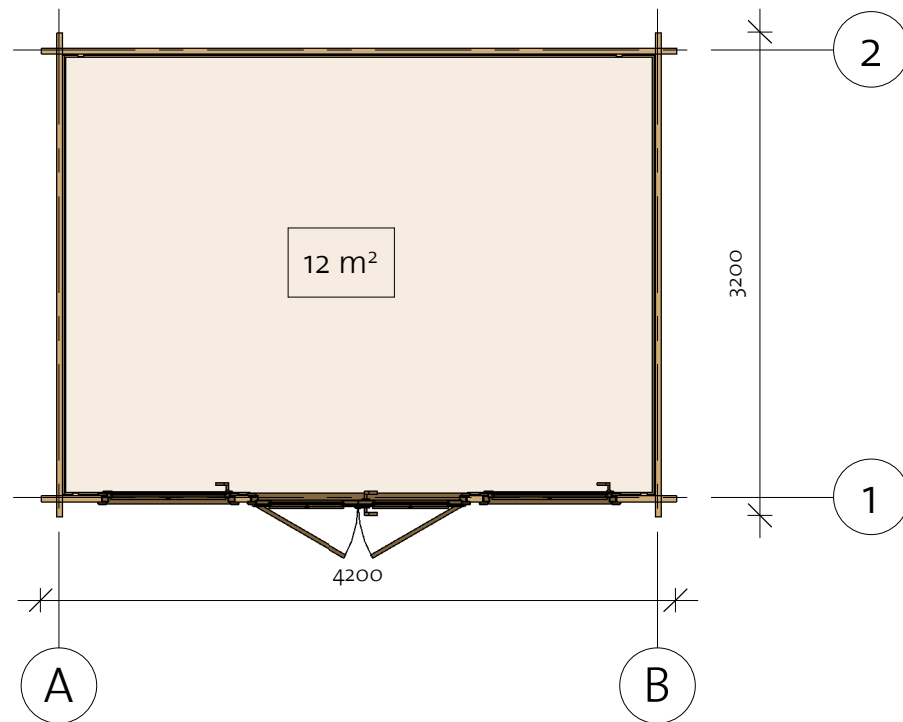

Cleo 40 (400x300)

Floor Plan

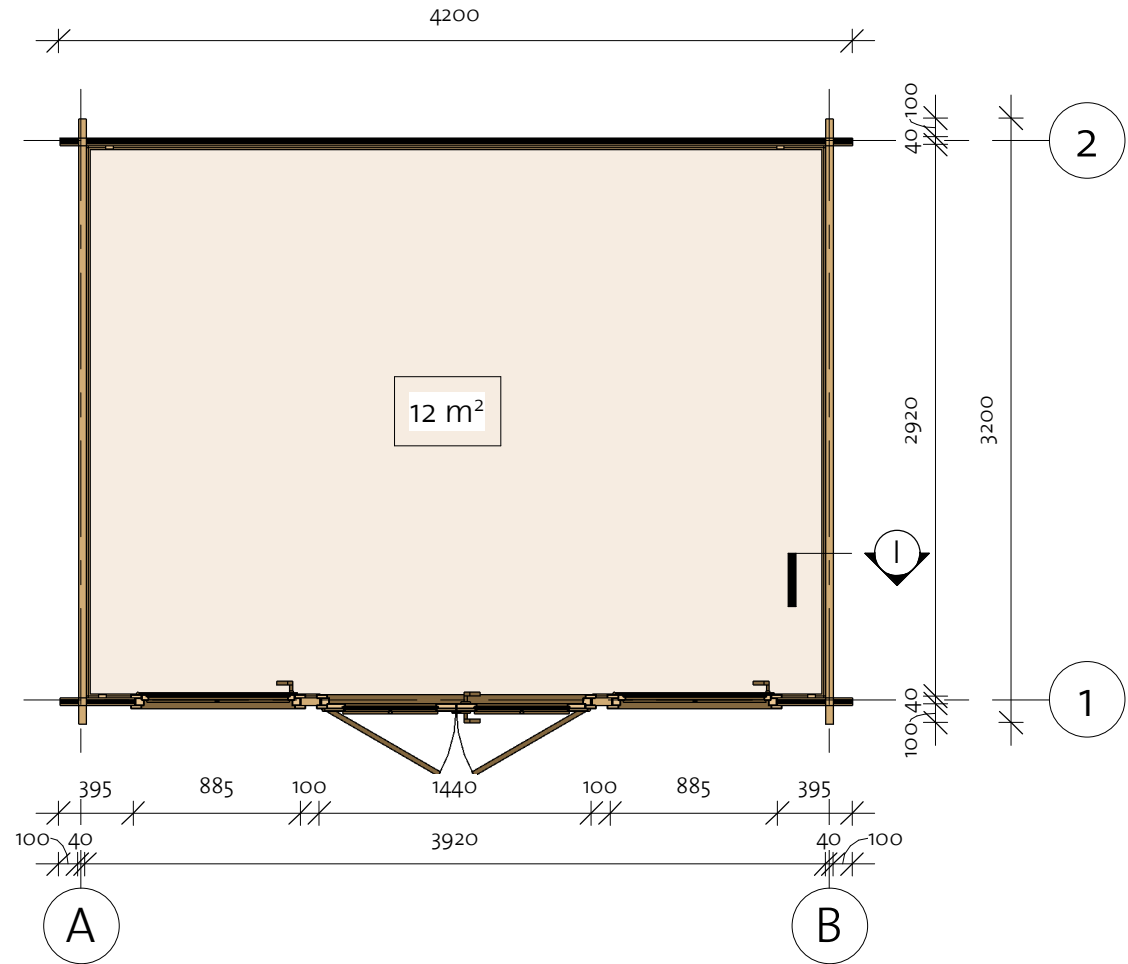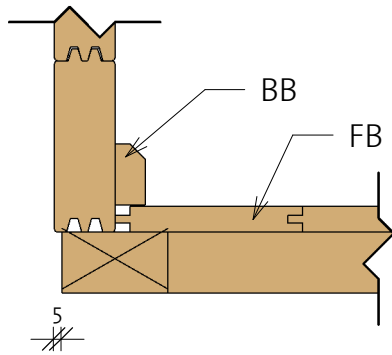① Baseboard



Floor Schedule

Mark	Type	Profile	Count	Length
FB	FB 17x114		36	2918
BB1	BB 20x40		2	4000
BB2	BB 20x40		2	3000


91923053_211203

Cleo 40 (400x300)

Wall 1


Columns			
Mark	Profile	Count	Length

CM	Post 100x40	2	1890
----	----------------	---	------

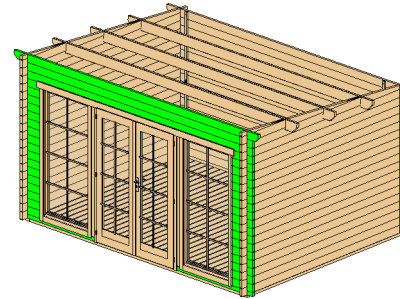

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40x57	2	1380
1LG-1	40x114	34	395
1LG-2	40x114	2	4200
1TL-1	40x114	1	4400

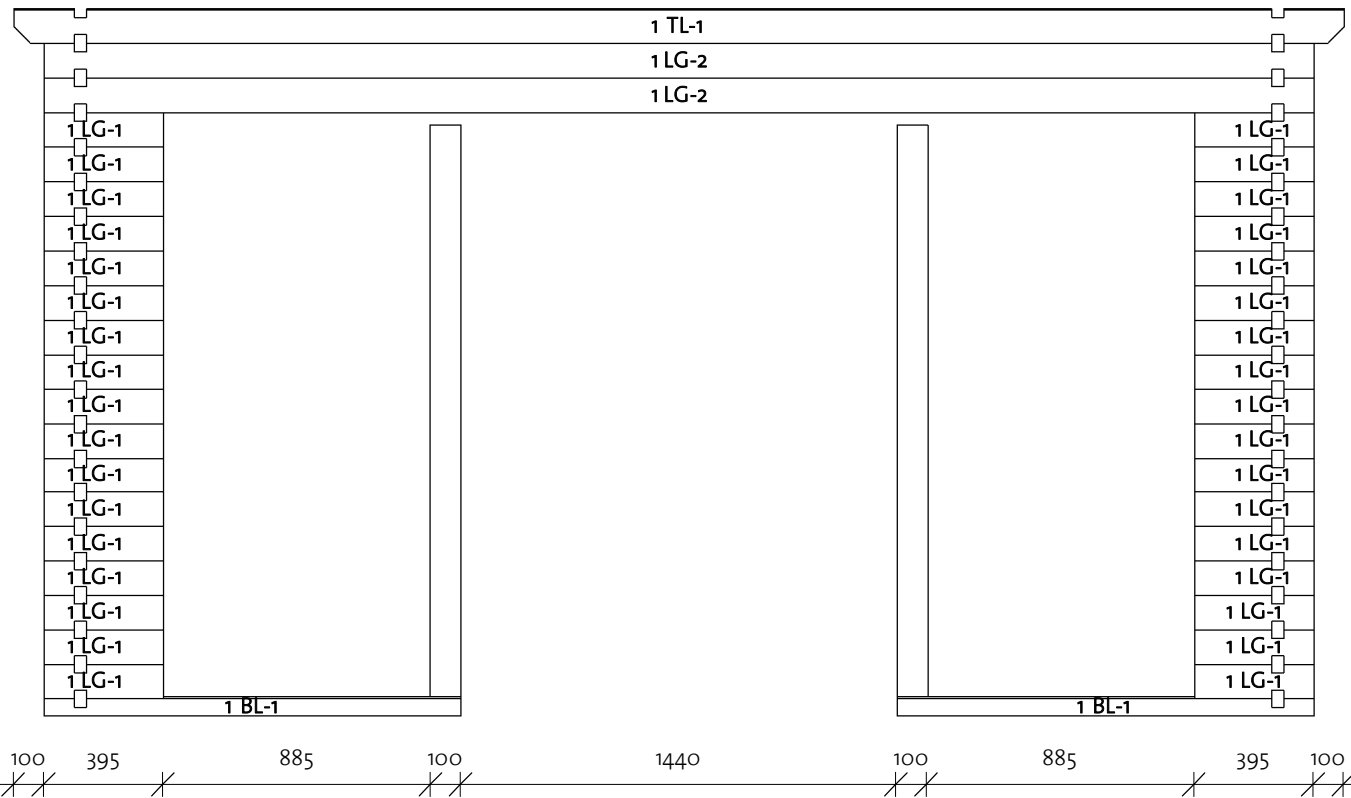


Log Profile Wall 1	
Profile	Profile

40x57	
40x114	
40x114	


Cleo 40 (400x300)

Wall 2

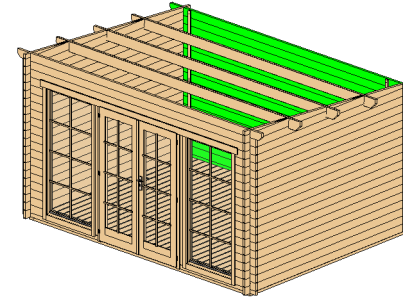

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4200
2LG-1	40X114	17	4200
2TL-1	40X114	1	4400

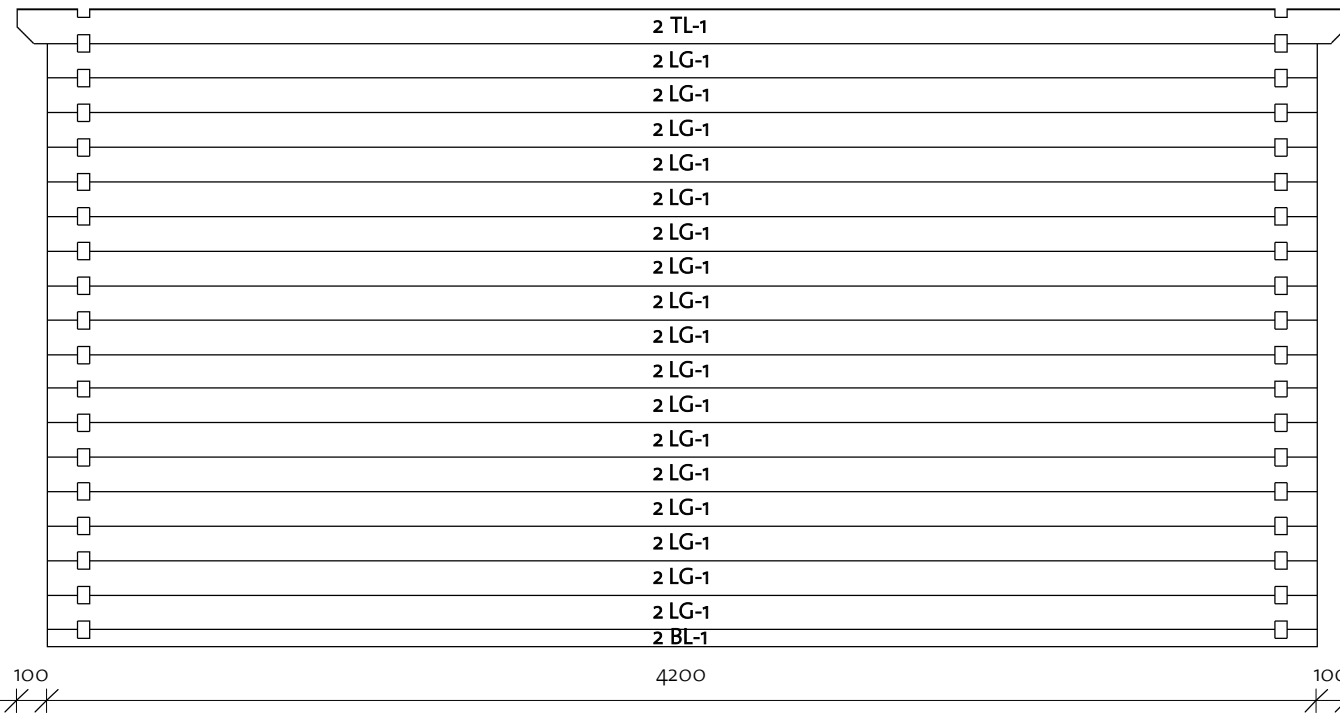


Log Profile Wall 2	
Profile	Profile

40X57	
40X114	
40X114	


Cleo 40 (400x300)

Wall A

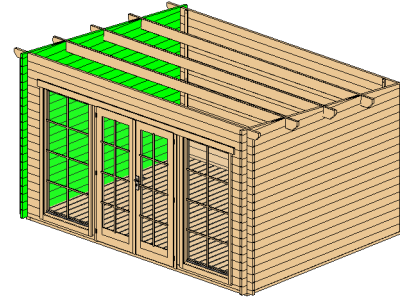

Wall A			
Mark	Profile	Count	Cut Length

ALG-1*	40x114	1	841
ALG-2*	40x114	1	2310
ALG-3	40x114	18	3200
ALG-4*	40x114	1	3200

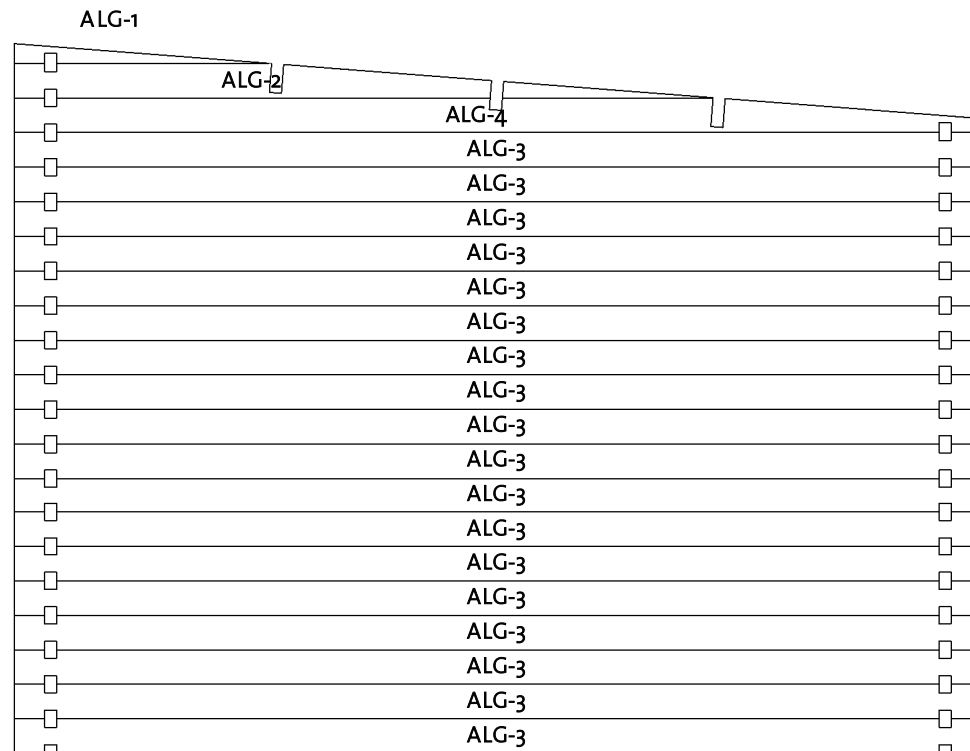


* Gable - delivered premounted

Log Profile Wall A	
Profile	Profile

40x114	
--------	--

Cleo 40 (400x300)


Wall B

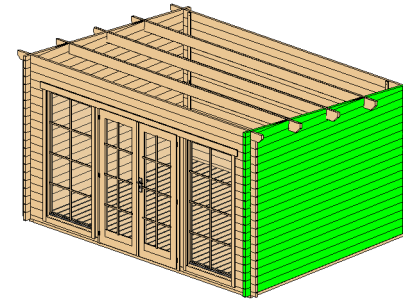


Wall B			
Mark	Profile	Count	Cut Length

BLG-1*	40X114	1	841
BLG-2*	40X114	1	2310
BLG-3	40X114	18	3200
BLG-4*	40X114	1	3200

* Gable - delivered premounted

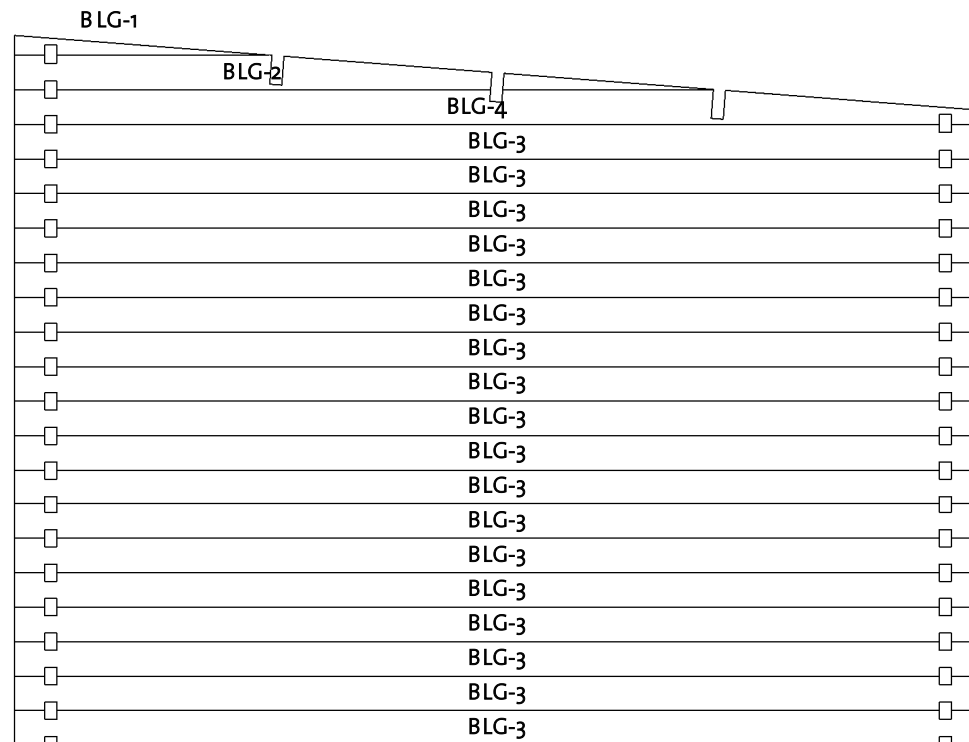





Log Profile Wall B	
Profile	Profile


40X114	
--------	---

Cleo 40 (400x300)

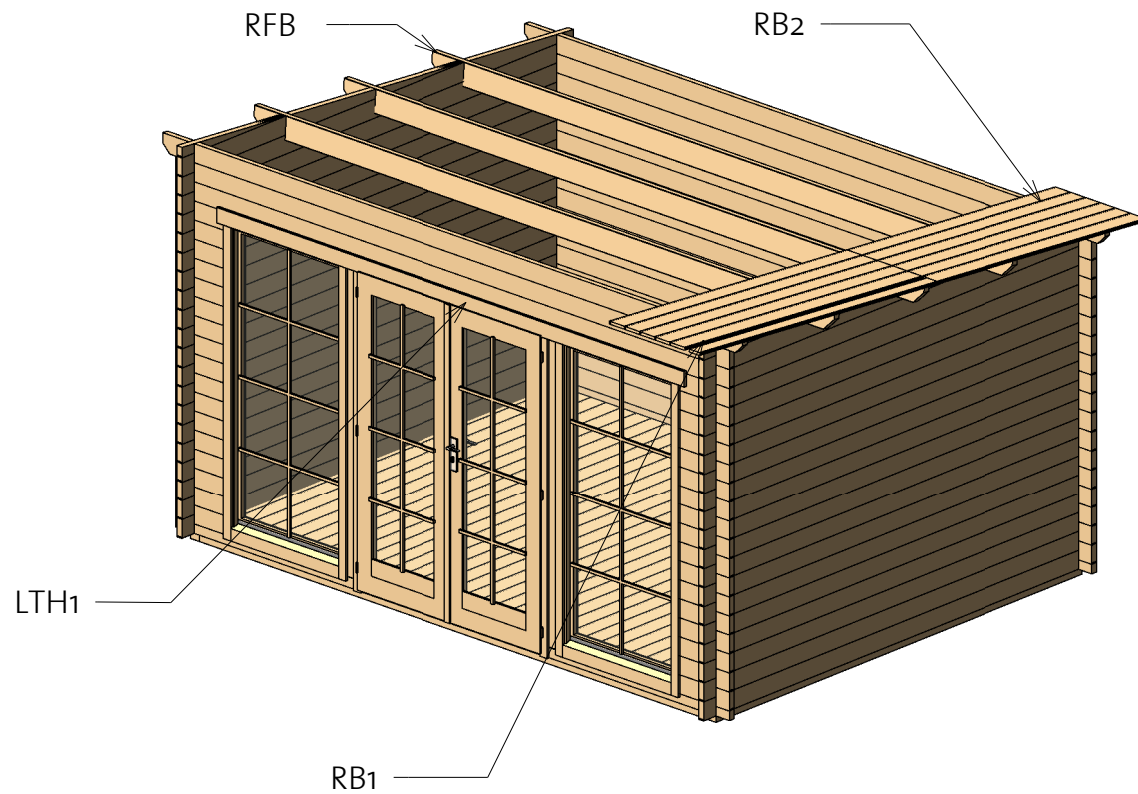Roof 1




Roof				
Mark	Type	Profile	Count	Length
RB1	17x114		40	1938
RB2	17x114		40	1712
RFB	Beam 40x143		3	4400



Lath list				
Mark	Type	Profile	Count	Length
LTH1	18x95		2	3550

Cleo 40 (400x300)


Roof 2

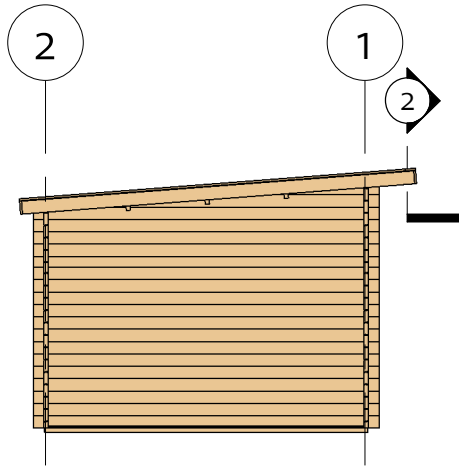

② Facia

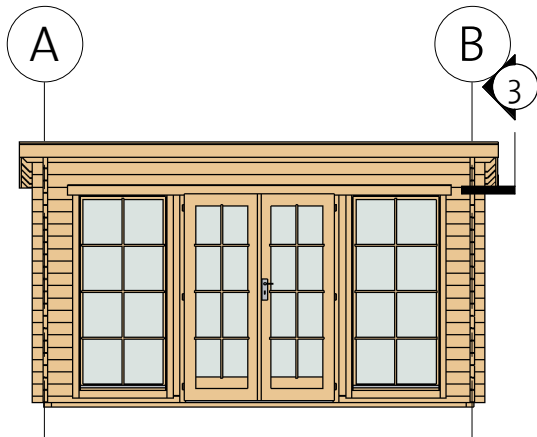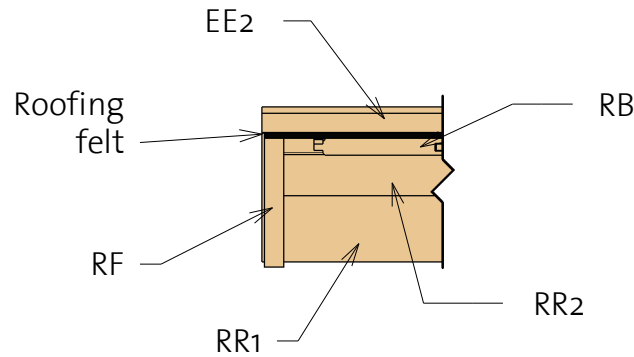

③ Roof Reinforcement

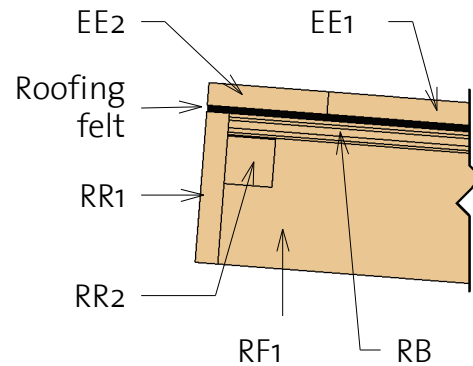


Fascia Schedule


Mark	Type	Profile	Count	Length
EE1	Eave Edging 18x95		2	3590
EE2	Eave Edging 18x95		1	4440
RF	Roof Fascia 18x120		2	3650
RR1	Roof reinforcement 18x120		2	4440
RR2	Roof reinforcement 38x38		2	4400

Cleo 40 (400x300)

Extras

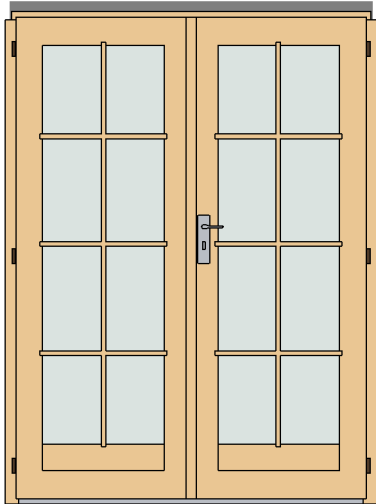

Door Schedule				
Mark	Type	Width	Height	Count
CDD3R	Classic double door 3 right	1425	1955	1
DCB8	Door Crossbar 8	--	--	2

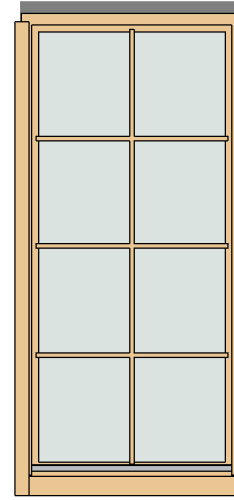

Window Schedule				
Mark	Type	Width	Height	Count
CW4R	Classic window 4 right	875	1890	2
WCB8	Windows Crossbar 8	--	--	2

Fasteners/Extras		
Name	Type	Count

Hitblock	300-400 mm	
Bolts	M8 x 70	12
Screws	5,0 x 70	15
Nails	1,4 x 40	40
Screws	6,0 x 140	50
Screws	4,0 x 40	620

Family	Count	Length
--------	-------	--------

Windboard 18x40	4	2200
-----------------	---	------




- * Windows intended for tilt opening only!
- * Fenster zur Eröffnung nur zum Kippen vorgesehen!
- * Aknad on ette nähtud ainult kaldu avamiseks!


Cleo 40 (400x300)

List of all items 1

Impregnated foundation beams


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


IFB1	IFB 70x40		2	2990
------	--------------	---	---	------


IFB2	IFB 70x40		7	3850
------	--------------	---	---	------

Roof

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


RB1	17x114		40	1938
-----	--------	---	----	------


RB2	17x114		40	1712
-----	--------	---	----	------

RFB	Beam 40x143		3	4400
-----	----------------	---	---	------

Floor Schedule

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------


FB	FB 17x114		36	2918
----	-----------	---	----	------


BB1	BB 20x40		2	4000
-----	-------------	---	---	------


BB2	BB 20x40		2	3000
-----	-------------	--	---	------


Fascia Schedule


Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

EE1	Eave Edging 18x95		2	3590
-----	----------------------	---	---	------

EE2	Eave Edging 18x95		1	4440
-----	----------------------	---	---	------


RF	Roof Fascia 18x120		2	3650
----	-----------------------	---	---	------

RR1	Roof reinforcement 18x120		2	4440
-----	---------------------------------	---	---	------

RR2	Roof reinforcement 38x38		2	4400
-----	--------------------------------	---	---	------

Lath list

Mark	Type	Profile	Count	Length
------	------	---------	-------	--------

LTH1	18x95		2	3550
------	-------	---	---	------

Cleo 40 (400x300)

List of all items 2

Wall 1			
Mark	Profile	Count	Cut Length

1BL-1	40X57	2	1380
1LG-1	40X114	34	395
1LG-2	40X114	2	4200
1TL-1	40X114	1	4400

Wall 2			
Mark	Profile	Count	Cut Length

2BL-1	40X57	1	4200
2LG-1	40X114	17	4200
2TL-1	40X114	1	4400

Wall A			
Mark	Profile	Count	Cut Length



ALG-1*	40X114	1	841
ALG-2*	40X114	1	2310
ALG-3	40X114	18	3200
ALG-4*	40X114	1	3200

Wall B			
Mark	Profile	Count	Cut Length


BLG-1*	40X114	1	841
BLG-2*	40X114	1	2310
BLG-3	40X114	18	3200
BLG-4*	40X114	1	3200

* Gable - delivered premounted

Log Profiles	
Profile	Profile

40X57	
40X114	

Log Profiles	
Profile	Profile

40X114	
--------	---

Columns			
Mark	Profile	Count	Length


CM	Post 100X40	2	1890
----	----------------	---	------

Windboard

① Windboard Assembly 1



② Windboard Assembly 2

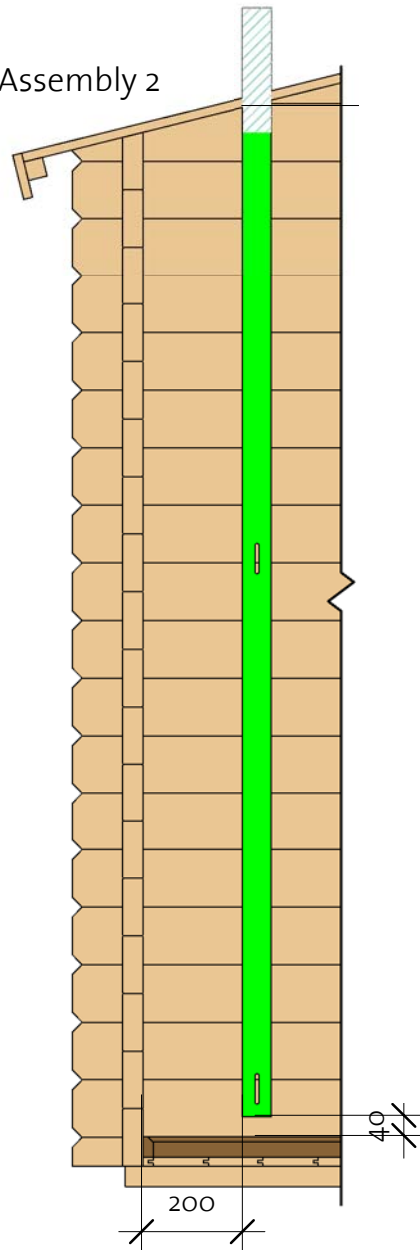

③ Windboard Assembly 3

